



EV10AS180AGS

Low power L-Band 10-bit 1.5 GSps ADC

Datasheet

Main Features

- Single core ADC architecture with 10-bit Resolution integrating a selectable 1:1/2/4 DEMUX
- 1.5 GSps guaranteed Conversion rate
- Differential input clock (AC coupled)
- Analog input voltage: 500 mVpp differential full scale (AC coupled)
- Analog and clock input impedance: 100Ω Differential
- LVDS Differential Output Data with swing adjustment and Data Ready
- Fine adjustment of ADC Gain, Offset
- Fine adjustment of Sampling Delay for interleaving
- Static and dynamic Test Mode for ADC and DEMUX
- Data Ready common to the 4 output ports
- 1.75W Power Dissipation (1:2 ratio with standard LVDS output swing)
- Power supply : 5.2 V, 3.3V and 2.5V (Output buffers)
- CI-CGA255 Package

Performances


- 2.250 GHz Full power input bandwidth (-3dB)
- Low Latency 2.5-5.5 clock cycles
- Gain Flatness:
 - ~0.5dB from 10MHz to 750 MHz (1st Nyquist)
 - ~1.2dB from 750MHz to 1500MHz (2nd Nyquist)
 - ~1.5dB from 1500MHz to 1800MHz (L Band)
- Single Tone performance:
 - SFDR = -60 dBFS; ENOB =8.4-Bit; SNR = 54 dBFS at Fin= 750 MHz @-3dBFS, Fs=1.5GSps
 - SFDR = -59 dBFS; ENOB =8.0-Bit; SNR = 52 dBFS at Fin= 1800 MHz @-3dBFS, Fs=1.5GSps
 - SFDR = -62 dBFS; ENOB =8.5-Bit; SNR = 55 dBFS at Fin= 750 MHz @-12dBFS, Fs=1.5GSps
 - SFDR = -61 dBFS; ENOB =8.4-Bit; SNR = 54 dBFS at Fin= 1800 MHz @-12dBFS, Fs=1.5GSps
- Broadband performance:
 - NPR = 44 dB at -13dBFS optimum loading factor in 1st Nyquist
 - NPR = 43 dB at -13dBFS optimum loading factor in L-band
- Radiation hardening sensitivity
 - ELDRS (Enhanced Low Dose Rate Sensitivity) free up to 110Krad
 - No SEFI / No SEL

Main Applications

- Direct L-band RF Down Conversion
- Defense radar systems
- Satellite communication systems

1 GENERAL DESCRIPTION

Figure 1. ADC with integrated DEMUX Block diagram

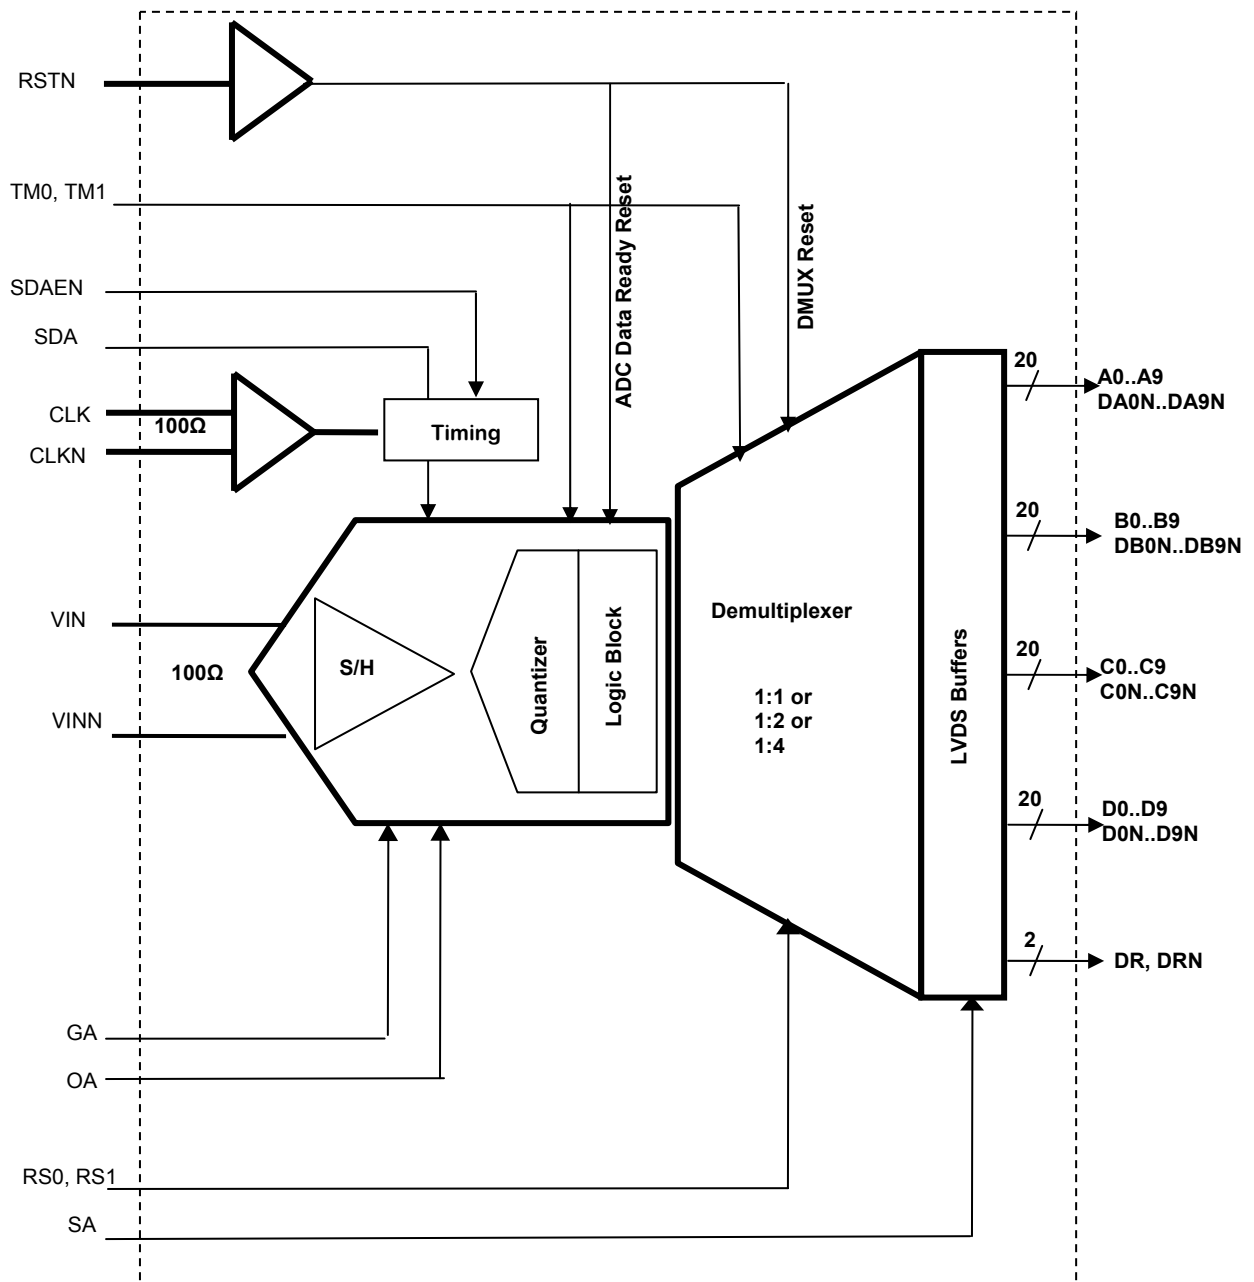

The EV10AS180A is a 10-bit 1.5 GSps ADC. The device includes a front-end Track and Hold stage (T/H), followed by an analog encoding stage (Analog Quantizer) which outputs analog residues resulting from analog quantization. Successive banks of latches regenerate the analog residues into logical levels before entering an error correction circuitry and a resynchronization stage followed by a DEMUX with 100Ω differential output buffers.

The EV10AS180A works in fully differential mode from analog inputs up to digital outputs. It operates in the first Nyquist and L-Band (Fin ranging from DC to 1800 MHz).

DEMUX Ratio (1:1 or 1:2 or 1:4) can be selected with the 2 pins RS0, RS1.

DEMUX outputs are synchronous on each port.

A differential Data Ready output is available to indicate when the outputs are valid. The Data Ready DR, DRN is common to the 4 ports.

A power up reset ensures to synchronize internal signals and ensures output data to be properly ordered. An external Reset (RSTN) can also be used.

The gain control pin GA and offset control OA are provided to adjust the ADC gain and offset transfer function. The swing of ADC output buffers can be lowered through the SA pin.

A Sampling Delay Adjust function (SDA) is provided to fine tune the ADC aperture delay, for applications requesting the interleaving of multiple ADCs for example.

For debug and testability, the following functions are provided:

- a static test mode, used to test either VOL or VOH at the ADC outputs (all bits at "0" level or "1" level respectively);
- a dynamic built-In Test, providing series of "1"s and "0" in a checker board pattern fashion on all 4 ports;

A diode is provided to monitor the junction temperature, with both anode and cathode accessible.

2 CIRCUIT ELECTRICAL CHARACTERISTICS

2.1. Absolute Maximum Ratings

Table 1. Absolute Maximum ratings

Parameter	Symbol	Comments	Value	Unit
V _{CC5} supply voltage	V _{CC5}		GND to 6	V
V _{CC3} supply voltage	V _{CC3}		GND to 3.6	V
V _{CC0} supply voltage	V _{CC0}		GND to 3	V
Analog input voltages	V _{IN} or V _{INN}	Common Mode	Min :2.0V Max 4.0V	V
Maximum difference between V _{IN} and V _{INN}	V _{IN} - V _{INN}		2.0 (4 Vpp=+13dBm in 100Ω)	V
Clock input voltage	V _{CLK} or V _{CLKN}	Common Mode	Min :2.0V Max 4.0V	V
Maximum difference between V _{CLK} and V _{CLKN}	V _{CLK} - V _{CLKN}		1.5 (3 Vpp)	V
Analog input settings	V _A	OA, GA, SDA, SA	-0.3 to V _{CC3} + 0.3	V
Control inputs	V _D	SDAEN, TM0, TM1, DECN, RS0, RS1, RSTN	-0.3 to V _{CC3} + 0.3	V
Junction Temperature	T _J		170	°C
Storage Temperature	T _{stg}		-65 to 150	°C

Notes: 1. Absolute maximum ratings are limiting values (referenced to GND = 0V), to be applied individually, while other parameters are within specified operating conditions. Long exposure to maximum rating may affect device reliability.

All integrated circuits have to be handled with appropriate care to avoid damages due to ESD. Damage caused by inappropriate handling or storage could range from performance degradation to complete failure.

2. Maximum ratings enable active inputs with ADC powered off.

3. Maximum ratings enable floating inputs with ADC powered on.

2.2. Recommended Conditions Of Use

Table 2. Recommended Conditions of Use

Parameter	Symbol	Comments	Typ	Unit
Power supplies	V _{CC5}	No specific power supply sequencing required during power ON/OFF ⁽¹⁾	5.2	V
	V _{CC3}		3.3	V
	V _{CC0}		2.5	V
Differential analog input voltage (Full Scale)	V _{IN} - V _{INN}	100 Ω differential	500	mVpp
Clock input power level (Ground common mode)	P _{CLK} P _{CLKN}	100 Ω differential input	4	dBm
Operating Temperature Range	T _c , T _j	For functionality	T _c >-55 to T _j <125	°C
Operating Temperature Range	T _c , T _j	For performances	T _c >-55 to T _j <110	°C

Notes: 1. To benefit of the internal power on reset, V_{CC3} should be applied before V_{CC5}. Please refer to section 5.5 for more details.

2.3. Electrical Characteristics

Unless otherwise stated, requirements apply over the full operating temperature range (for performance) and at all power supply conditions

Table 3. Electrical characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Test level
RESOLUTION		10			bit	1,6
ESD CLASSIFICATION		>1000V (HBM model)			V	NA
POWER REQUIREMENTS						
Power Supply voltage						
- Analog	VCC5	5.0	5.2	5.5	V	1,6
- Analog Core and Digital	VCC3	3.15	3.3	3.45	V	
- Output buffers	VCCO	2.4	2.5	2.6	V	
Power Supply current in 1:1 DEMUX Ratio						
- Analog	I_VCC5		71	85	mA	1,6
- Analog Core and Digital	I_VCC3		300	330	mA	
- Output buffers	I_VCCO		100	110	mA	
Power Supply current in 1:2 DEMUX Ratio						
- Analog	I_VCC5		71	85	mA	1,6
- Analog Core and Digital	I_VCC3		312	335	mA	
- Output buffers	I_VCCO		137	160	mA	
Power Supply current in 1:4 DEMUX Ratio						
- Analog	I_VCC5		71	85	mA	1,6
- Analog Core and Digital	I_VCC3		325	355	mA	
- Output buffers	I_VCCO		216	240	mA	
Power dissipation						
- 1:1 Ratio with standard LVDS output swing	P _D		1.6	1.9	W	1,6
- 1:2 Ratio with standard LVDS output swing	P _D		1.75	2.0	W	
- 1:4 Ratio with standard LVDS output swing	P _D		1.9	2.3	W	
LVDS Data and Data Ready Outputs						
Logic compatibility		LVDS differential				
Output Common Mode ⁽¹⁾	VOCM	1.125	1.25	1.375	V	1,6
Differential output ⁽¹⁾⁽²⁾	VODIFF	250	350	450	mVp	1,6
Output level "High" ⁽³⁾	VOH	1.25	-	-	V	1,6
Output level "Low" ⁽³⁾	VOL	-	-	1.25	V	1,6
Output data format		Binary				1,6
ANALOG INPUT						
Input type		AC coupled				
Analog Input Common Mode (for DC coupled input)			3.1		V	
Full scale input voltage range (differential mode)	VIN VINN	-125 -125		+125 +125	mVp mVp	1,6
Full scale analog input power level	PIN		-5		dBm	1,6
Analog input capacitance (die only)	CIN		0.3		pF	5
Input leakage current (VIN = VINN = 0V)	IIN		50		μA	5
Analog Input resistance (Differential)	RIN	96	100	104	Ω	1,6
CLOCK INPUT (CLK, CLKN)						
Input type		DC or AC coupled				
Clock Input Common Mode (for DC coupled clock)	VICM		2		V	1,6
Clock Input power level (low phase noise sinewave input) at 1.5Ghz 100Ω differential	PCLK	0	4	+7	dBm	4
Clock input swing (differential voltage) at 1.5Ghz	VCLK VCLKN	±447	±708	±1000	mVp	4
Clock input capacitance (die only)	CCLK		0.3		pF	4
Clock Input resistance (Differential)	RCLK	94	98	102	Ω	4
RSTN (active low)						
Logic compatibility		2.5V CMOS compatible				
Input level "High"	VIH	2.0			V	1,6
Input level "Low"	VIL			0.4	V	1,6
DIGITAL INPUTS (RS0, RS1, DECN, SDAEN, TM1, TM0)						

Parameter	Symbol	Min	Typ	Max	Unit	Test level
Logic low						1,6
Resistor to ground	R _{IL}	0		10	Ω	
Voltage level	V _{IL}	-		0.5	V	
Input current	I _{IL}	-		450	μA	
Logic high						1,6
Resistor to ground	R _{IH}	10k		infinite	Ω	
Voltage level	V _{IH}	2.0		-	V	
Input current	I _{IH}	-		150	μA	
OFFSET, GAIN & SAMPLING DELAY ADJUST SETTINGS (OA, GA, SDA)						
Min voltage for minimum Gain, Offset or SDA	Analog_min	2*V _{cc3} /3 - 0.5			V	1,6
Max voltage for maximum Gain, Offset or SDA	Analog_max			2*V _{cc3} /3 + 0.5	V	1,6
Input current for min setting	I _{min}			200	μA	1,6
Input current for nominal setting	I _{nom}			50	μA	1,6
Input current for max setting	I _{max}			200	μA	1,6
ANALOG SETTINGS (SA)						
SA voltage for default swing value	Smax			2*V _{cc3} /3		1,6
SA voltage for minimum swing value	Smin	2*V _{cc3} /3 - 0.5				1,6
Input current (low, for default swing value)	I _{min}			50	μA	1,6
Input current (high) for min swing value	I _{max}			150	μA	1,6

- Notes
1. Assuming 100Ω termination ASIC load
 2. VODIFF can be lowered down to 100 mV with SA pin to reduce power consumption.
 3. VOH min and VOL max can never be 1.25V at the same time when VODIFFmin.

2.4. Converter Characteristics

Unless otherwise stated, requirements apply over the full operating temperature range (for performance) and at all power supply conditions

Table 4. DC Converter characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Test level
Resolution			10		bit	1,6
DC ACCURACY						
Missing codes	M _{CODES}	None allowed				1,6
Differential Non Linearity (for information only)	DNL+		0.5	0,9	LSB	1,6
Integral Non Linearity (for information only)	INL+		1.0	4.0	LSB	1,6
Integral Non Linearity (for information only)	INL-		-1.0	-4.0	LSB	1,6
Gain central value @10MHz ⁽¹⁾	ADC _{GAIN}	0.95	1.0	1.05		1,6
Gain error drift vs temperature			+/-10		%	4
ADC offset ⁽²⁾	ADC _{OFFSET}			+/-10	LSB	1,6

- Notes:
1. The ADC Gain center value can be tuned thanks to Gain adjust function.
 2. The ADC offset can be tuned to mid code 512 thanks to Offset adjust function.

2.5. Dynamic Performance

Unless otherwise stated, requirements apply over the full operating temperature range (for performance) and at all power supply conditions assuming an external clock jitter of 225 fs rms (corresponds to e2v testbench value). ADC internal clock jitter is 200 fs rms.

Table 5. Dynamic Performance

Parameter	Symbol	Min	Typ	Max	Unit	Test level
AC Analog Inputs						
Full power Input Bandwidth (-3dB)	FPBW		2.25		GHz	4
Gain Flatness (from 10 to 750 MHz)			0.5		dB	4
Gain Flatness (from 750 to 1500 MHz)			1.2		dB	4

EV10AS180AGS

Parameter	Symbol	Min	Typ	Max	Unit	Test level
Gain Flatness (from 1500 to 1800 MHz)			1.5		dB	4
Deviation from linear phase (1 st Nyquist)			5		°	5
Deviation from linear phase (2 nd Nyquist)			1		°	5
Deviation from linear phase (L-band up to 2.25 GHz)			2		°	5
Input voltage standing Wave Ratio up to 1.8 GHz (unpowered device)	VSWR			1.2:1		4
AC Performance in 1st Nyquist -12dBFS differential input mode, 50% clock duty cycle, +4dBm differential clock, external jitter = 225 fs rms max						
Signal to Noise And Distortion Ratio FS = 1.5 GSps Fin = 750 MHz	SINAD	48.7	53		dBFS	1,6
Effective Number of Bits FS = 1.5 GSps Fin = 750 MHz	ENOB	7.8	8.5		Bit FS	1,6
Signal to Noise Ratio FS = 1.5 GSps Fin = 750 MHz	SNR	52	55		dBFS	1,6
Total Harmonic Distortion (25 harmonics) FS = 1.5 GSps Fin = 750 MHz	THD	49	60		dBFS	1,6
Spurious Free Dynamic Range FS = 1.5 GSps Fin = 750 MHz	SFDR	52	62		dBFS	1,6
Noise Power Ratio Notch centered on 50 MHz, notch width 500 KHz on 20MHz -700 MHz band 1.5 GSps at optimum loading factor of -13.1 dBFS	NPR		44.0		dB	4
Noise Power Ratio Notch centered on 350 MHz, notch width 500 KHz on 20MHz -700 MHz band 1.5 GSps at optimum loading factor of -13.1 dBFS	NPR		44.0		dB	4
Noise Power Ratio Notch centered on 657 MHz, notch width 500 KHz on 20MHz -700 MHz band 1.5 GSps at optimum loading factor of -13.1 dBFS	NPR		44.0		dB	4
IMD3 differential (2Fin1 – Fin2, 2Fin2 – Fin1, unfilterable 3rd order Intermodulation products) At -7 dBFS Fin1 = 790 MHz Fin2 = 800 MHz	IMD3		-63		dBc	4
AC Performance in 2nd Nyquist -12dBFS differential input mode, 50% clock duty cycle, +4dBm differential clock, external jitter = 225 fs rms max						
Noise Power Ratio Notch centered on 800 MHz, notch width 500 KHz on 770MHz -1450 MHz band 1.5 GSps at optimum loading factor of -13.1 dBFS	NPR		44.0		dB	5
Noise Power Ratio Notch centered on 1100 MHz, notch width 500 KHz on 770MHz -1450 MHz band 1.5 GSps at optimum loading factor of -13.1 dBFS	NPR		44.0		dB	5
Noise Power Ratio Notch centered on 1407 MHz, notch width 500 KHz on 770MHz -1450 MHz band 1.5 GSps at optimum loading factor of -13.1 dBFS	NPR		44.0		dB	5

EV10AS180AGS

Parameter	Symbol	Min	Typ	Max	Unit	Test level
AC Performance in LBAND -12dBFS differential input mode, 50% clock duty cycle, +4dBm differential clock, external jitter = 225 fs rms max						
Signal to Noise And Distortion Ratio FS = 1.5 GSps Fin = 1800 MHz	SINAD	48.7	52		dBFS	1,6
Effective Number of Bits FS = 1.5 GSps Fin = 1800 MHz	ENOB	7.8	8.4		Bit FS	1,6
Signal to Noise Ratio FS = 1.5 GSps Fin = 1800 MHz	SNR	52	54		dBFS	1,6
Total Harmonic Distortion (25 harmonics) FS = 1.5 GSps Fin = 1800 MHz	THD	49	58		dBFS	1,6
Spurious Free Dynamic Range FS = 1.5 GSps Fin = 1800 MHz	SFDR	52	61		dBFS	1,6
Noise Power Ratio Notch centered on 1550 MHz, notch width 500 KHz on 1520MHz -2200 MHz band 1.5 GSps at optimum loading factor of -13.1 dBFS	NPR		43		dB	5
Noise Power Ratio Notch centered on 1850 MHz, notch width 500 KHz on 1520MHz -2200 MHz band 1.5 GSps at optimum loading factor of -13.1 dBFS	NPR		43		dB	5
Noise Power Ratio Notch centered on 2157 MHz, notch width 500 KHz on 1520MHz -2200 MHz band 1.5 GSps at optimum loading factor of -13.1 dBFS	NPR		42		dB	5
IMD3 differential (2Fin1 – Fin2, 2Fin2 – Fin1, unfilterable 3rd order Intermodulation products) At -7 dBFS Fin1 = 1550 MHz Fin2 = 1560 MHz	IMD3		-55		dBc	4
AC Performance in 1st Nyquist -3dBFS differential input mode, 50% clock duty cycle, +4dBm differential clock, external jitter = 225 fs rms max						
Signal to Noise And Distortion Ratio FS = 1.5 GSps Fin = 750 MHz	SINAD	46.3	52		dBFS	1,6
Effective Number of Bits FS = 1.5 GSps Fin = 750 MHz	ENOB	7.4	8.4		Bit FS	1,6
Signal to Noise Ratio FS = 1.5 GSps Fin = 750 MHz	SNR	50	54		dBFS	1,6
Total Harmonic Distortion (25 harmonics) FS = 1.5 GSps Fin = 750 MHz	THD	48	56		dBFS	1,6
Spurious Free Dynamic Range FS = 1.5 GSps Fin = 750 MHz	SFDR	50	60		dBFS	1,6
AC Performance in L Band -3dBFS differential input mode, 50% clock duty cycle, +4dBm differential clock, external jitter = 225 fs rms max						
Signal to Noise And Distortion Ratio FS = 1.5 GSps Fin = 1800 MHz	SINAD	45.1	50		dBFS	1,6
Effective Number of Bits FS = 1.5 GSps Fin = 1800 MHz	ENOB	7.2	8.0		Bit FS	1,6
Signal to Noise Ratio FS = 1.5 GSps Fin = 1800 MHz	SNR	49	52		dBFS	1,6
Total Harmonic Distortion (25 harmonics) FS = 1.5 GSps Fin = 1800 MHz	THD	47	56		dBFS	1,6

Parameter	Symbol	Min	Typ	Max	Unit	Test level
Spurious Free Dynamic Range FS = 1.5 GSps Fin = 1800 MHz	SFDR	50	59		dBFS	1,6

2.6. Sensitivity to radiations

2.6.1. Total dose

The component is not sensitive to 110Krad with very low dose rate (36rad / hr) and it is therefore ELDRS (Enhanced Low Dose Rate Sensitivity) free

2.6.2. Heavy ions

It was concluded that the devices under test (P/N EV10AS180A) have:

- No SEL (SEL measured up to a LET of 80.72 MeV.cm²/mg at 125degC with a tilt and up to 67.7 MeV.cm²/mg at 125degC without tilt),
- No SEFI
- No permanent error
- Low LET threshold of 0.7 to 1.6 MeV.cm²/mg → device may be sensitive to proton
- Saturated cross-section in the range of 3.8E-5 to 2.1 E-04 cm²
- Worst case long SEU/SET duration is 48 consecutive corrupted data
- For a geostationary satellite:
 - SEE of 2.48E-04 to 8.24E-02/device.day
 - Worst case Multiconversion errors is 1.27E-02/device/day (MTBF > 78 days)
 - Worst case Single conversion errors 8.24E-02/device.day (MTBF > 12 days)

2.6.3. Proton tests

It was concluded that the devices under test (P/N EV10AS180A) have:

- No SEL (up to 184 MeV),
- No SEFI
- No permanent error
- Energy threshold is lower than 20 MeV
- Saturated cross-section in the range of 1E-10 to 1.3E-09 cm²
- Worst case long SEU/SET duration is 5 consecutive corrupted data
- For a geostationary satellite:
 - SEE of 4.47E-05 to 7.83E-03/device.day
 - Worst case Multiconversion errors is 1.16E-03/device/day (MTBF > 862 days)
 - Worst case Single conversion errors of 7.83E-03/device.day (MTBF > 127 days)
- For a LEO JASON satellite:
 - SEE of 7.12E-04 to 8.94E-02/device.day
 - Worst case Multiconversion errors is 1.36E-02/device/day (MTBF > 73 days)
 - Worst case Single conversion errors of 8.94E-02/device.day (MTBF > 11 days)

2.7. Timing Characteristics and Switching Performances

Unless otherwise stated, requirements apply over the full operating temperature range (for performance) and at all power supply conditions

See Chapter 3 “ Definition of Term”

Table 6. Timing characteristics and Switching Performances

Parameter	Symbol	Min	Typ	Max	Unit	Test level
SWITCHING PERFORMANCE AND CHARACTERISTICS						
Maximum clock frequency ⁽¹⁾ 1:1 DEMUX Ratio 1:2 DEMUX Ratio 1:4 DEMUX Ratio		700 1500 1500			MHz	1,6
Clock frequency range ⁽¹⁾		300		1500	MHz	4
Maximum Output Rate per port (Data) 1:1 DEMUX Ratio 1:2 DEMUX Ratio 1:4 DEMUX Ratio		700 750 375			MspS	4
Analog input frequency		DC		1800	MHz	4
BER @ 1.5GSps @ -12dBFS				10 ⁻⁹	Error/sample	5
TIMING						
ADC settling time (VIN-VINN = 400 mV pp) (+/- 2%)	TS		770		ps	4
ADC step response (10% to 90%)			160		ps	4
Clock duty cycle		40	50	60	%	4
Minimum clock pulse width (high)	TC1	0.25		0.375	ns	4
Minimum clock pulse width (low)	TC2	0.25		0.375	ns	4
Aperture delay ^{(1) (6)}	TA		250		ps	4
Aperture delay adjustment	SDA	-42		+42	ps	4
Aperture jitter added by the ADC ^{(1) (6)}			200		fs rms	4
Output rise/fall time for DATA (20% to 80%) ⁽³⁾	TR/TF	320	400	480	ps	4
Output rise/fall time for DATA READY (20% to 80%) ⁽³⁾	TR/TF	510	700	890	ps	4
Data output delay ⁽⁴⁾ DMUX 1:1 DMUX 1:2 and 1:4	TOD		3 3.4		ns ns	4
Data Ready output delay ⁽⁴⁾ DMUX 1:1 DMUX 1:2 and 1:4 DMUX 1:2 and 1:4	TDR TOD - TDR		3.7 3.7 0.3		ns ns ns	4
Output Data to Data Ready propagation delay ⁽⁵⁾ DMUX 1:1 @ 750 MSps sampling rate DMUX 1:2 @ 1.5 GSps sampling rate DMUX 1:4 @ 1.5 GSps sampling rate	TD1	1.08 0.84 1.45	1.13 1 1.5	1.20 1.10 1.55	ns ns ns	4
Data Ready to Output Data propagation delay ⁽⁵⁾ DMUX 1:1 @ 750 MSps sampling rate DMUX 1:2 @ 1.5 GSps sampling rate DMUX 1:4 @ 1.5 GSps sampling rate	TD2	0.16 0.31 1.1	0.2 0.44 1.2	0.24 0.49 1.25	ns ns ns	4

EV10AS180AGS

Parameter	Symbol	Min	Typ	Max	Unit	Test level
Output Data Pipeline delay	TPDO		3.5		Clock cycle	4
1:1 DEMUX Ratio						
Port A						
1:2 DEMUX Ratio						
Port A						
Port B						
1:4 DEMUX Ratio						
Port A						
Port B						
Port C						
Port D						
Data Ready Pipeline delay	TPDR		4		Clock cycle	4
1:1 DEMUX Ratio						
1:2 DEMUX Ratio						
1:4 DEMUX Ratio			7.5			
RSTN to DR, DRN	TRDR	10			ns	4
RSTN min pulse duration		4			ns	4

Notes

1. See Definition Of Terms.
2. Data Ready outputs are active on both rising and falling edges (DR/2 mode)
3. $L_{LOAD} = 5 \text{ nH}$, $C_{LOAD} = 5 \text{ pF}$ termination (for each single-ended output).
4. TOD and TDR propagation times are defined at package input/outputs. They are given for reference only.
5. Values for TD1 and TD2 are given for a 1.5 GSps external clock frequency (50% duty cycle). For different sampling rates, apply the following formula: $TD1 = T/2 + (|TOD-TDR|)$ and $TD2 = T/2 + (|TOD-TDR|)$, where T =clock period. This places the rising edge (True-False) of the differential Data Ready signal in the middle of the Output Data valid window. This gives maximum setup and hold times for external data acquisition.
6. Aperture delay and aperture jitter measured with SDA = OFF (default setting at RESET)

2.8. Timing Diagrams

Figure 1 Principle of operation, DMUX 1:1

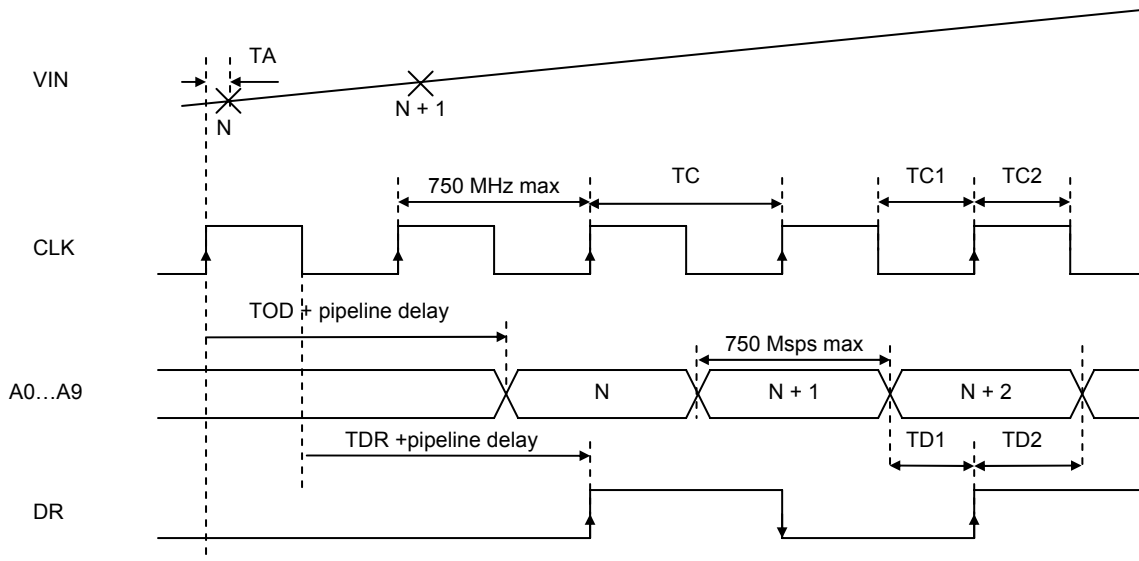


Figure 2 Principle of operation, DMUX 1:2

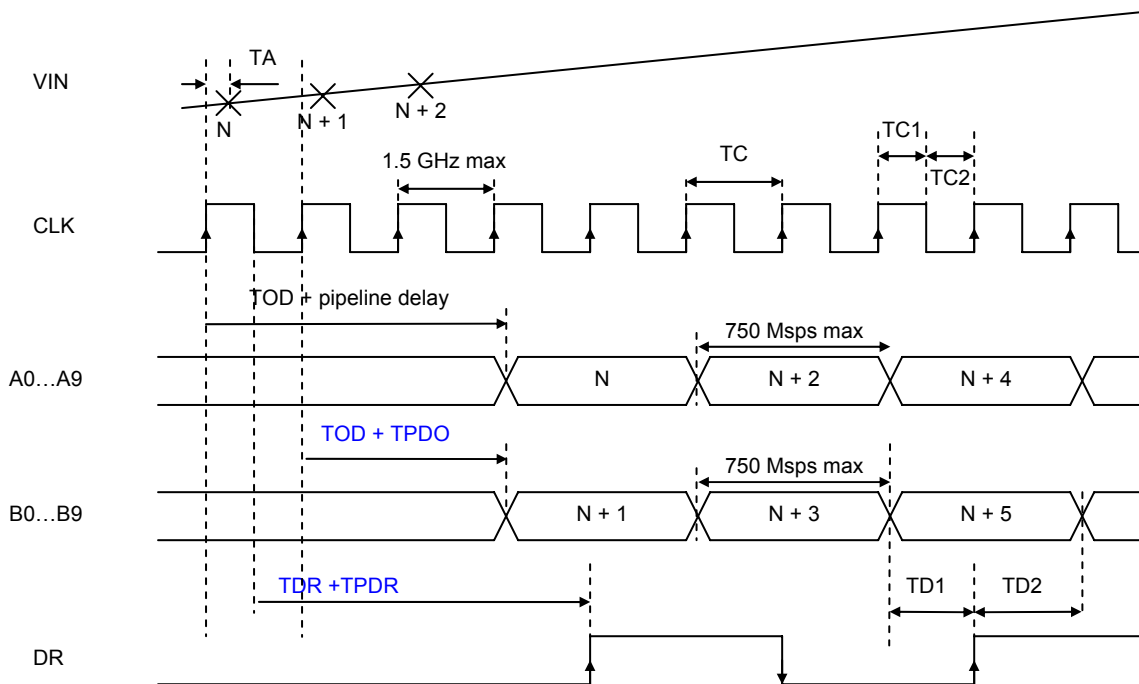


Figure 3 Principle of operation, DMUX 1:4



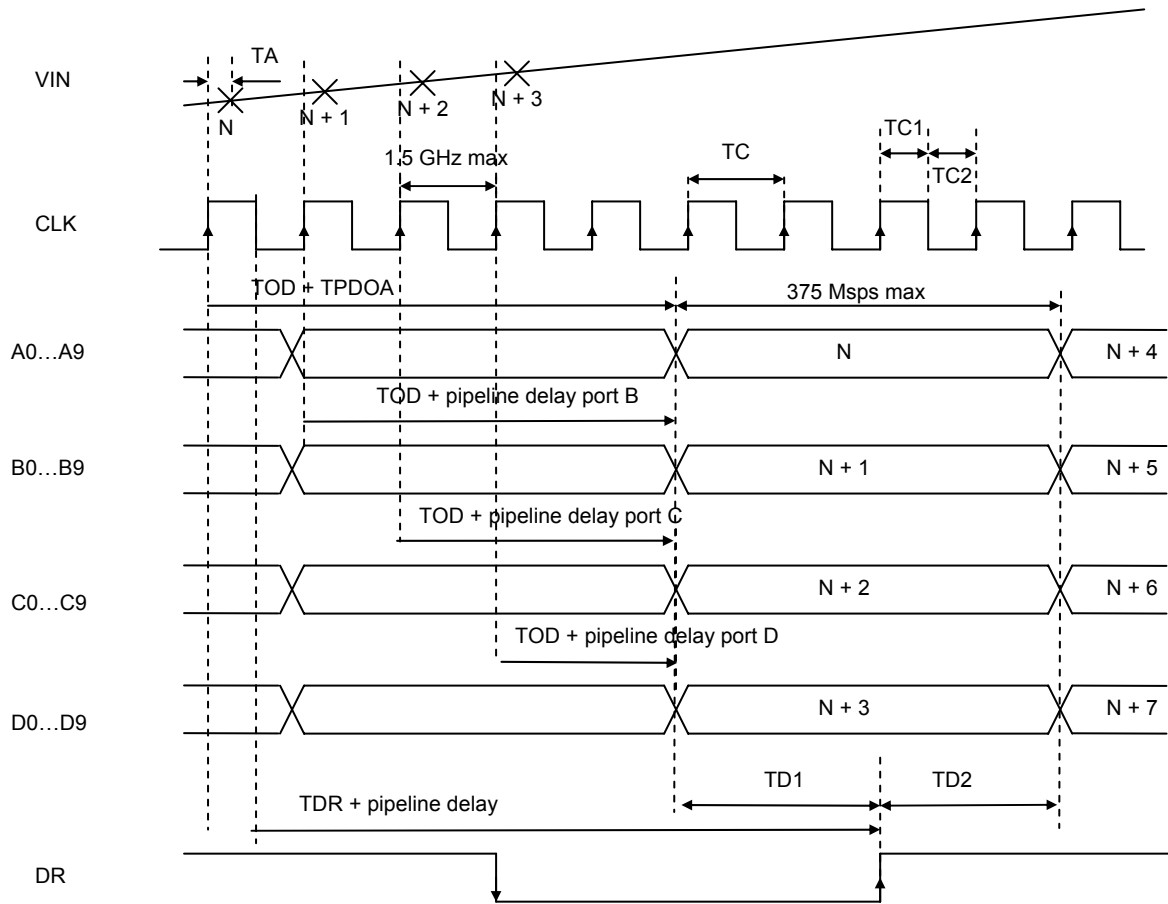


Figure 4 Power up reset Timing diagram (1:1 DMUX)

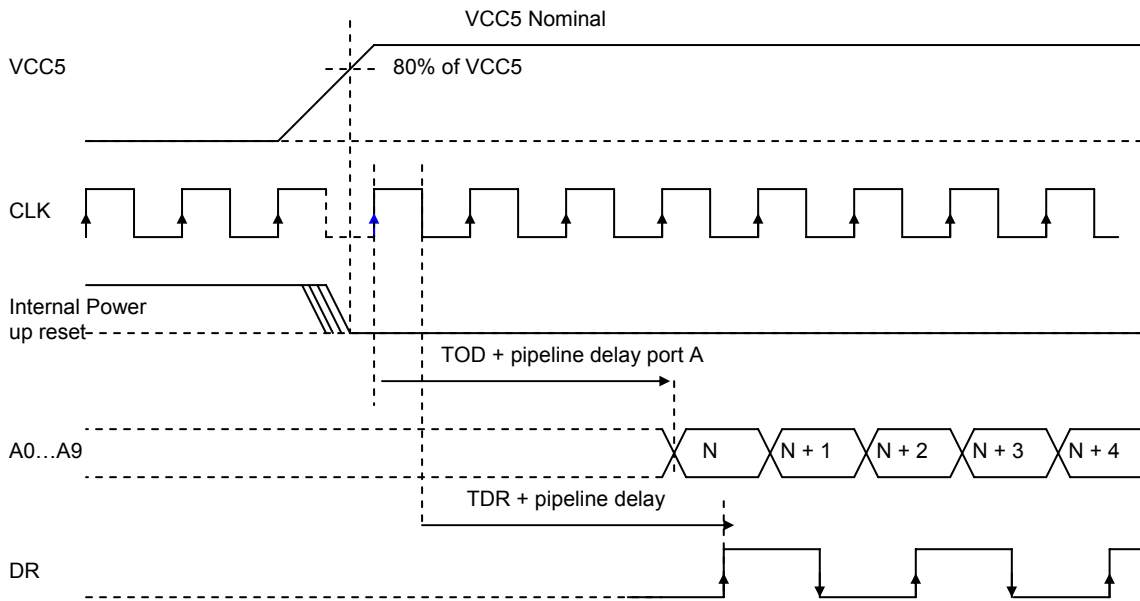

Note : assuming VCC3 is already switched on.

Figure 5 External reset Timing diagram (1:1 DMUX)

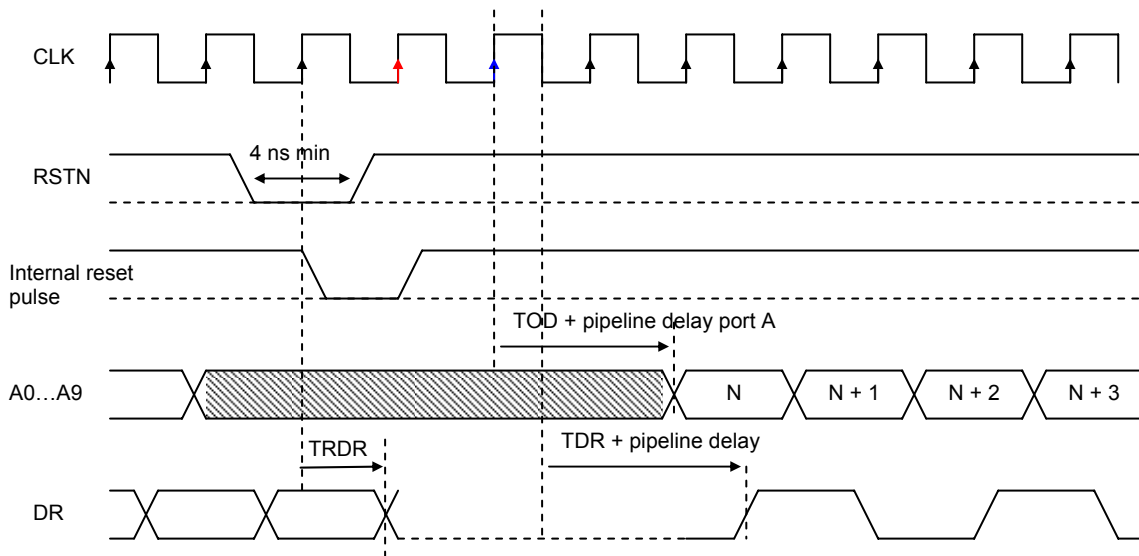

2.9. Explanation of Test Levels

1	100% production tested at +25°C ⁽¹⁾ .
2	100 % production tested at +25°C ⁽¹⁾ , and sample tested at specified temperatures.
3	Sample tested only at specified temperatures
4	Parameter is guaranteed by design and characterization testing (thermal steady-state conditions at specified temperature).
5	Parameter is a typical value only guaranteed by design only
6	100 % production tested over specified temperature range (for D/T and Space Grade ⁽²⁾).

Notes: Only MIN and MAX values are guaranteed (typical values are issuing from characterization results).

⁽¹⁾ Unless otherwise specified.

⁽²⁾ If applicable, please refer to “Ordering Information”

2.10. Coding

Table 7. ADC Coding table

Differential analog input	Voltage level	Digital output
		Binary MSB (bit 9).....LSB (bit 0)
> + 250.25 mV	>Top end of full scale + ½ LSB	1 1 1 1 1 1 1 1 1 1
+ 250.25 mV + 249.75 mV	Top end of full scale + ½ LSB Top end of full scale - ½ LSB	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 0
+ 125.25 mV + 124.75 mV	³ / ₄ full scale + ½ LSB ³ / ₄ full scale - ½ LSB	1 1 0 0 0 0 0 0 0 0 1 0 1 1 1 1 1 1 1 1
+ 0.25 mV - 0.25 mV	Mid scale + ½ LSB Mid scale - ½ LSB	1 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1
- 124.75 mV - 124.25 mV	¹ / ₄ full scale + ½ LSB ¹ / ₄ full scale - ½ LSB	0 1 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1
- 249.75 mV - 250.25 mV	Bottom end of full scale + ½ LSB Bottom end of full scale - ½ LSB	0 0 0 0 0 0 0 0 0 1 0 0 0 0 0 0 0 0 0 0
< - 250.25 mV	< Bottom end of full scale - ½ LSB	0 0 0 0 0 0 0 0 0 0


3 DEFINITION OF TERM

(Fs max)	<i>Maximum Sampling Frequency</i>	Performances are guaranteed up to Fs max
(Fs min)	<i>Minimum Sampling frequency</i>	Performances are guaranteed for FS higher than FS min.
(BER)	<i>Bit Error Rate</i>	Probability to exceed a specified error threshold for a sample at maximum specified sampling rate. An error code is a code that differs by more than +/- 32 LSB from the correct code.
(AIF)	<i>Analog Input Frequency</i>	Analog input frequency range for which performances are guaranteed
(FPBW)	<i>Full power input bandwidth</i>	Analog input frequency at which the fundamental component in the digitally reconstructed output waveform has fallen by 3 dB with respect to its low frequency value (determined by FFT analysis) for input at Full Scale -1 dB (- 1 dBFS).
(SSBW)	<i>Small Signal Input bandwidth</i>	Analog input frequency at which the fundamental component in the digitally reconstructed output waveform has fallen by 3 dB with respect to its low frequency value (determined by FFT analysis) for input at Full Scale -10 dB (- 10 dBFS).
(SINAD)	<i>Signal to noise and distortion ratio</i>	Ratio expressed in dB of the RMS signal amplitude, set to 1dB below Full Scale (- 1 dBFS), to the RMS sum of all other spectral components, including the harmonics except DC.
(SNR)	<i>Signal to noise ratio</i>	Ratio expressed in dB of the RMS signal amplitude, set to 1dB below Full Scale, to the RMS sum of all other spectral components excluding the twenty five first harmonics.
(THD)	<i>Total harmonic distortion</i>	Ratio expressed in dB of the RMS sum of the first twenty five harmonic components, to the RMS input signal amplitude, set at 1 dB below full scale. It may be reported in dB (i.e, related to converter -1 dB Full Scale), or in dBc (i.e, related to input signal level).
(SFDR)	<i>Spurious free dynamic range</i>	Ratio expressed in dB of the RMS signal amplitude, set at 1dB below Full Scale, to the RMS value of the highest spectral component (peak spurious spectral component). The peak spurious component may or may not be a harmonic. It may be reported in dB (i.e., related to converter -1 dB Full Scale), or in dBc (i.e, related to input signal level).
(ENOB)	<i>Effective Number Of Bits</i>	$ENOB = \frac{SINAD - 1.76 + 20 \log (A / FS/2)}{6.02}$ Where A is the actual input amplitude and FS is the full scale range of the ADC under test
(DNL)	<i>Differential non linearity</i>	The Differential Non Linearity for an output code i is the difference between the measured step size of code i and the ideal LSB step size. DNL (i) is expressed in LSBs. DNL is the maximum value of all DNL (i). DNL error specification of less than 1 LSB guarantees that there are no missing output codes and that the transfer function is monotonic.
(INL)	<i>Integral non linearity</i>	The Integral Non Linearity for an output code i is the difference between the measured input voltage at which the transition occurs and the ideal value of this transition. INL (i) is expressed in LSBs, and is the maximum value of all INL (i) .
(TA)	<i>Aperture delay</i>	Delay between the rising edge of the differential clock inputs (CLK, CLKN) (zero crossing point), and the time at which (V _{IN} , V _{INN}) is sampled.
(JITTER)	<i>Aperture uncertainty</i>	Sample to sample variation in aperture delay. The voltage error due to jitter depends on the slew rate of the signal at the sampling point.
(TS)	<i>Settling time</i>	Time delay to achieve 0.2 % accuracy at the converter output when a 80% Full Scale step function is applied to the differential analog input.
(ORT)	<i>Overvoltage recovery time</i>	Time to recover 0.2 % accuracy at the output, after a 150 % full scale step applied on the input is reduced to midscale.
(TOD)	<i>Digital data Output delay</i>	Delay from the rising edge of the differential clock inputs (CLK, CLKN) (zero crossing point) to the next point of change in the differential output data (zero crossing) with specified load.
(TDR)	<i>Data ready output delay</i>	Delay from the falling edge of the differential clock inputs (CLK, CLKN) (zero crossing point) to the next point of change in the differential output clock (zero crossing) with specified load.
(TD1)	<i>Time delay from Data</i>	General expression is TD1 = TC1 + TDR - TOD with TC = TC1 + TC2 = 1 encoding

	<i>transition to Data Ready</i>	clock period.
(TD2)	<i>Time delay from Data Ready to Data</i>	General expression is $TD2 = TC2 + TDR - TOD$ with $TC = TC1 + TC2 = 1$ encoding clock period.
(TC)	<i>Encoding clock period</i>	TC1 = Minimum clock pulse width (high) TC = TC1 + TC2 TC2 = Minimum clock pulse width (low)
(TPD)	<i>Pipeline Delay</i>	Number of clock cycles between the sampling edge of an input data and the associated output data being made available, (not taking in account the TOD).
(TRDR)	<i>Data Ready reset delay</i>	Delay between the falling edge of RSTN and the reset to digital zero transition of the Data Ready output signal DR
(TR)	<i>Rise time</i>	Time delay for the output DATA signals to rise from 20% to 80% of delta between low level and high level.
(TF)	<i>Fall time</i>	Time delay for the output DATA signals to fall from 20% to 80% of delta between low level and high level.
(PSRR)	<i>Power supply rejection ratio</i>	Ratio of input offset variation to a change in power supply voltage.
(NRZ)	<i>Non return to zero</i>	When the input signal is larger than the upper bound of the ADC input range, the output code is identical to the maximum code and the Out of Range bit is set to logic one. When the input signal is smaller than the lower bound of the ADC input range, the output code is identical to the minimum code, and the Out of range bit is set to logic one. (It is assumed that the input signal amplitude remains within the absolute maximum ratings).
(IMD)	<i>InterModulation Distortion</i>	The two tones intermodulation distortion (IMD) rejection is the ratio of either input tone to the worst third order intermodulation products.
(NPR)	<i>Noise Power Ratio</i>	The NPR is measured to characterize the ADC performance in response to broad bandwidth signals. When applying a notch-filtered broadband white-noise signal as the input to the ADC under test, the Noise Power Ratio is defined as the ratio of the average out-of-notch to the average in-notch power spectral density magnitudes for the FFT spectrum of the ADC output sample test.
(VSWR)	<i>Voltage Standing Wave Ratio</i>	The VSWR corresponds to the ADC input insertion loss due to input power reflection. For example a VSWR of 1.2 corresponds to a 20dB return loss (ie. 99% power transmitted and 1% reflected).

4 PIN DESCRIPTION

Figure 2. Pin Mapping (Top view)


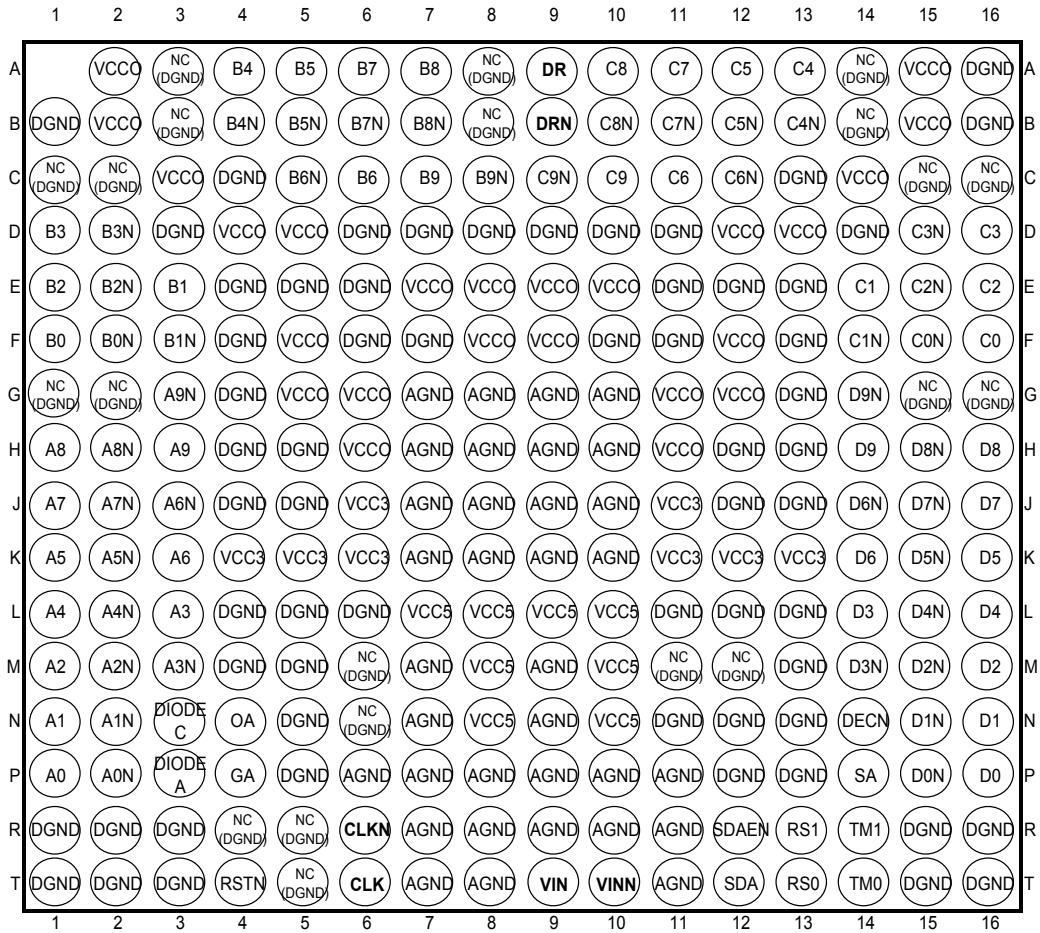


Note: Pin A1 is not populated.

Table 8. Pin description

Signal Name	Pin number	Description	Direction	Equivalent Simplified Schematics
POWER SUPPLIES				
V _{CC5}	L7, L8, L9, L10, M8, M10, N8, N10	5.2V analog supply (Front-end Track & Hold circuitry) Referenced to AGND	N/A	
V _{CC3}	J6, J11, K4, K5, K6, K11, K12, K13	3.3V power supply (ADC Core, Regeneration and Logic, DEMUX circuitry and Timing circuitry) Referenced to AGND	N/A	
V _{CC0}	A2, A15, B2, B15, C3, C14, D4, D5, D12, D13, E7, E8, E9, E10, F5, F8, F9, F12, G5, G6, G11, G12, H6, H11	2.5V digital power supply (output buffers) Referenced to DGND	N/A	
AGND	G7, G8, G9, G10, H7, H8, H9, H10, J7, J8, J9, J10, K7, K8, K9, K10, M7, M9, N7, N9, P6, P7, P8, P9, P10, P11, R7, R8, R9, R10, R11, T7, T8, T11	Analog Ground AGND plane should be separated from DGND on the board (the two planes can be connected by 0 ohm resistors)	N/A	
DGND	A16, B1, B16, C4, C13, D3, D6, D7, D8, D9, D10, D11, D14, E4, E5, E6, E11, E12, E13, F4, F6, F7, F10, F11, F13, G4, G13, H4, H5, H12, H13, J4, J5, J12, J13, L4, L5, L6, L11, L12, L13, M4, M5, M13, N5, N11, N12, N13, P5, P12, P13, R1, R2, R3, R15, R16, T1, T2, T3, T15, T16	Ground for output buffers DGND plane should be separated from AGND on the board (the two planes can be connected by 0 ohm resistors)	N/A	

Signal Name	Pin number	Description	Direction	Equivalent Simplified Schematics
ANALOG INPUTS				
VIN VINN	T9 T10	<p>Analog input (differential) with internal common mode at 3.1V</p> <p>It should be driven in AC coupling.</p> <p>Analog input is sampled and converted (10-bit) on each positive transition of the CLK input.</p> <p>Equivalent internal differential 100 Ω input resistor.</p>	I	
CLOCK INPUTS				
CLK CLKN	T6 R6	<p>Master sampling clock input (differential) with internal common mode at 2.65V</p> <p>It should be driven in AC coupling.</p> <p>Equivalent internal differential 100 Ω input resistor.</p>	I	

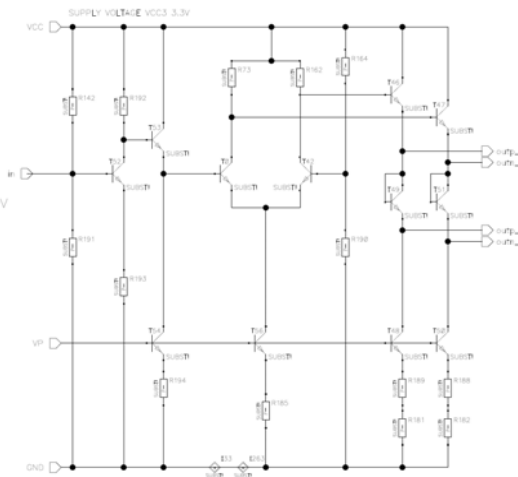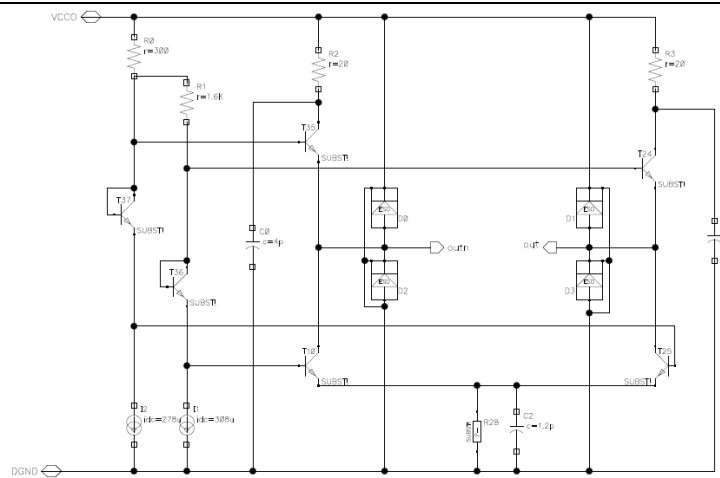Signal Name	Pin number	Description	Direction	Equivalent Simplified Schematics
RESET INPUT				
RSTN	T4	<p>Reset input (single-ended)</p> <p>It is available in case it is necessary to reset the ADC during operation (it is not mandatory to perform an external reset on the ADC for proper operation of the ADC as a power up reset is already implemented).</p> <p>This reset is Asynchronous, it is 2.5V CMOS compatible. It is active low.</p> <p>Refer to section 2.8 and 5.4</p>	I	 <p>input voltage command $\phi = 2.5\text{ V}$ CMOS compatible. If nothing applied in = 2.5 V</p>
DIGITAL OUTPUTS				
A0, A0N A1, A1N A2, A2N A3, A3N A4, A4N A5, A5N A6, A6N A7, A7N A8, A8N A9, A9N	P1, P2 N1, N2 M1, M2 L3, M3 L1, L2 K1, K2 K3, J3 J1, J2 H1, H2 H3, G3	<p>In-phase (A_i) and inverted phase (A_iN) digital outputs on DEMUX Port A (with $i = 0 \dots 9$)</p> <p>Differential LVDS signal</p> <p>DA0 is the LSB, DA9 is the MSB</p> <p>The differential digital output data is transmitted at clock rate divide by DMUX ratio (refer to RS0 and RS1 settings).</p> <p>Each of these outputs should be terminated by 100 Ω differential resistor placed as close as possible to the differential receiver.</p>	O	

Signal Name	Pin number	Description	Direction	Equivalent Simplified Schematics
D0, D0N D1, D1N D2, D2N D3, D3N D4, D4N D5, D5N D6, D6N D7, D7N D8, D8N D9, D9N	P16, P15 N16, N15 M16, M15 L14, M14 L16, L15 K16, K15 K14, J14 J16, J15 H16, H15 H14, G14	In-phase (Di) and inverted phase (DiN) digital outputs on DEMUX Port D (with i = 0...9) Differential LVDS signal D0 is the LSB, D9 is the MSB The differential digital output data is transmitted at clock rate divide by DMUX ratio (refer to RS0 and RS1 settings). Each of these outputs should be terminated by 100 Ω differential resistor placed as close as possible to the differential receiver.	O	
DR DRN	A9 B9	In-phase (DR) and inverted phase (DRN) global data ready digital output clock Differential LVDS signal The differential digital output clock is used to latch the output data on rising and falling edge. The differential digital output clock rate is (CLK/2) divided by the DMUX ratio (provided by RS0 and RS1 pins). This differential digital output clock should be terminated by 100 Ω differential resistor placed as close as possible to the differential receiver.	O	

Signal Name	Pin number	Description	Direction	Equivalent Simplified Schematics
ADDITIONAL FUNCTIONS				
DECN	N14	Decimation Function Enable (single-ended) Active low) Refer to section 5.9 for more information.	I	

Signal Name	Pin number	Description	Direction	Equivalent Simplified Schematics
TM0, TM1	T14, R14	<p>Test Mode</p> <p>Refer to section 5.3 for more information.</p>	I	<p>DRIVING BY RESISTOR : 10 Ohms or 10KOhms</p> <p>DRIVING BY VOLTAGE : 0.5V or 2V</p>
RS0, RS1	T13, R13	<p>DEMUX Ratio Selection</p> <p>Refer to section 5.2 for more information.</p>	I	

Signal Name	Pin number	Description	Direction	Equivalent Simplified Schematics
SDAEN	R12	<p>SDAEN = Sampling delay adjust enable SDA = Sampling delay adjust</p> <p>Please refer to section 5.10 for more information.</p>	I	
SDA	T12		I	

Signal Name	Pin number	Description	Direction	Equivalent Simplified Schematics
GA	P4	Gain Adjust Refer to section 5.6 for more information.	I	
OA	N4	Offset Adjust Refer to section 5.7 for more information.	I	
SA	P14	Swing adjust Refer to section 5.8 for more information.	I	
DIODEA	P3	Die Junction temperature monitoring (DIODEA = anode, DIODEC = cathode) Please refer to section 5.11 for more information	I	
DIODEC	N3		O	
NC	A3, A8, A14 B3, B8, B14 C1, C2, C15, C16 G1, G2, G15, G16 M6, M11, M12 N6 R4, R5, T5	Not connected pins, connect to ground (DGND)	N/A	

5 FUNCTIONAL DESCRIPTION

Table 9. Function Descriptions

Name	Function
V _{CC5}	5.2V Power supply
V _{CC3}	3.3V Power supply
V _{CC0}	2.5V Power supply
AGND	Analog Ground
DGND	Digital Ground
VIN, VINN	Differential Analog Input
CLK, CLKN	Differential Clock Input
[A0:A9] [A0N:A9N]	Differential Output Data on port A
[B0:B9] [B0N:B9N]	Differential Output Data on port B
[C0:C9] [C0N:C9N]	Differential Output Data on port C
[D0:D9] [D0N:D9N]	Differential Output Data on port D
DR, DRN	Global Differential Data Ready
SA	Analog tuning to adjust output swing
RS0; RS1	DEMUX Ratio select
RSTN	External reset
TM0, TM1	Test Mode pins
SDA	Sampling Delay Adjust input
SDAEN	Sampling Delay Adjust Enable
GA	Gain Adjust input.
OA	Offset adjust input
DECN	Decimation enable
DIODEA, DIODEC	Diode for die junction temperature monitoring

5.1. Control signal settings

The RS0, RS1, TM0, TM1, SDAEN and DECN control signals use the same static input buffer.

Logic "1" (10 K Ω to Ground, or tied to V_{CC3} = 3.3V, or left floating) was chosen for the default modes:

- 1:2 DMUX (RS1 = RS0 = "1"), please refer to section 3.2 for more information,
- Test Mode off (TM0 = TM1 = "1"), please refer to section 3.3 for more information,
- decimation off (please refer to section 3.8 for more information),
- SDA off (please refer to section 3.9 for more information).

Figure 6 Control signal settings

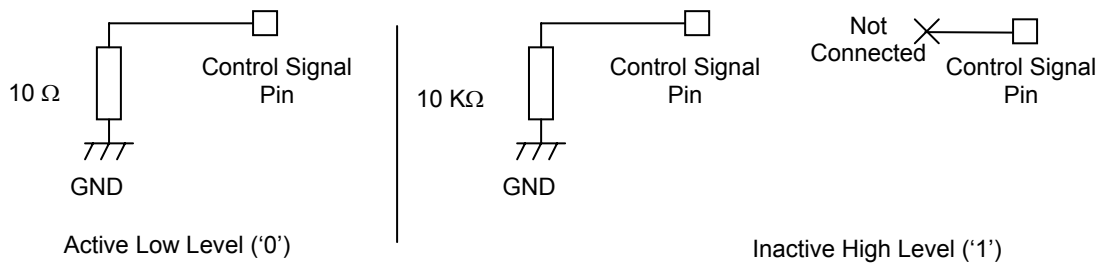


Table 10. ADC Mode Settings - Summary

Function	Logic Level	Electrical Level	Description
SDAEN	0	10 Ω to ground or 0.5V	Sampling delay adjust enabled
	1	10 KΩ to ground or 2V N/C	Sampling delay adjust disabled
DECN	0	10 Ω to ground or 0.5V	Decimation by 8
	1	10 KΩ to ground or 2V N/C	Normal conversion (no decimation)
RS<1:0>	01	RS1 : 10 Ω to ground or 0.5V RS0 : 10 KΩ to ground or NC or 2V	1:1 DEMUX Ratio (Port A)
	11	RS1 : 10 KΩ to ground or NC or 2V RS0 : 10 KΩ to ground or NC or 2V	1:2 DEMUX Ratio (Ports A and B)
	10	RS1 : 10 KΩ to ground or NC or 2V RS0 : 10 Ω to ground or 0.5V	1:4 DEMUX Ratio (Ports A, B C and D)
	00	RS1 : 10 Ω to ground or 0.5V RS0 : 10 Ω to ground or 0.5V	Not used
TM<1:0>	01	TM1 : 10 Ω to ground or 0.5V TM 0 : 10 KΩ to ground or NC or 2V	Static Test (all "0"s at the output for VOL test)
	11	TM 1 : 10 KΩ to ground or NC or 2V TM 0 : 10 KΩ to ground or NC or 2V	Normal conversion mode (default mode)
	10	TM 1 : 10 KΩ to ground or NC or 2V TM 0 : 10 Ω to ground or 0.5V	Static Test (all "1"s at the output for VOH test)
	00	TM1 : 10 Ω to ground or 0.5V TM0 : 10 Ω to ground or 0.5V	Dynamic test (checker board pattern = all bits toggling from "0" to "1" or "1" to "0" every cycle with 1010101010 or 0101010101 patterns)

5.2. DEMUX Ratio Select (RS0, RS1) function


Three DEMUX Ratios can be selected thanks to pins RS0 and RS1 according to the table below.

Table 11. Ratio Select coding

RS<1:0>	01	1:1 DEMUX Ratio (Port A)
	11	1:2 DEMUX Ratio (Ports A and B)
	10	1:4 DEMUX Ratio (Ports A, B C and D)
	00	Not used

ADC in 1:1 Ratio


Input Words:
1, 2, 3, 4, 5, 6, 7, 8...




Output Words:

Port A 1 2 3 ...
Port B Not Used
Port C Not Used
Port D Not Used

ADC in 1:2 Ratio

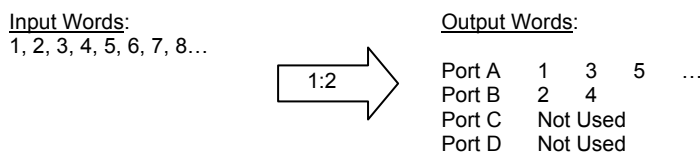

ADC in 1:4 Ratio

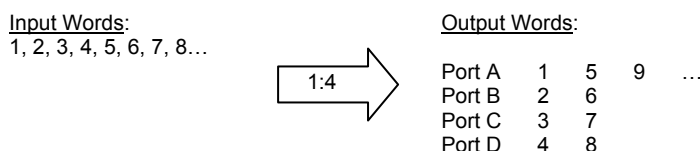

- Notes:
1. Data of the different ports are synchronous: they appear at the same instant on each port.
 2. Any used port should be terminated by a 100 Ω differential resistor. Refer to section 7.4 for more information.
 3. Any unused port can be left open (no external termination required).

5.3. Test Mode (TM0, TM1) function

Two test modes are made available in order to test the 10-bit digital outputs of the ADC:

- a static test mode, where one can choose to output only “1”s or only “0”s;
- a dynamic test mode, where all bits toggle from “1” to “0” or from “0” to “1” every cycle, used to test the output transitions.

The coding table for the Test mode is given in Table 4.

Table 12. Test Mode coding

TM<1:0>	01	Static Test (all “0”s at the 10-bit output for VOL test)
	11	Normal conversion mode (default mode)
	10	Static Test (all “1”s at the 10-bit output for VOH test)
	00	Dynamic test (checker board pattern = all 10 bits toggling from “0” to “1” or “1” to “0” every cycle with 1010101010 or 0101010101 patterns)

Note: the sequence should start with on port A, whatever the DMUX mode is.

Table 13. Test Mode

Cycle	DR	X9	X8	X7	X6	X5	X4	X3	X2	X1	X0
N		0	1	0	1	0	1	0	1	0	1
N+1		1	0	1	0	1	0	1	0	1	0
N+2		0	1	0	1	0	1	0	1	0	1
N+3		1	0	1	0	1	0	1	0	1	0
N+4		0	1	0	1	0	1	0	1	0	1

5.4. External Reset (RSTN)

An external reset (RSTN) is available in case it is necessary to reset the ADC during operation (it is not mandatory to perform an external reset on the ADC for proper operation of the ADC as a power up reset is already implemented). This reset is 2.5V CMOS compatible. It is active low.

5.5. Power Up Reset

A power up reset ensures to synchronise internal signals and ensures output data to be properly ordered. It is generated internally by the digital section of the ADC (on VCC3 power supply) and is de-activated when VCC5 reaches 80% of its steady state value. No sequencing is required on VCCO.

If VCC3 is not applied before VCC5, RSTN reset is strongly recommended to properly synchronise ADC signals.

Please refer to section 2.8, Figure 4 for more information.

5.6. Gain Adjust (GA) function

This function allows to adjust ADC Gain so that it can always be tuned to 1.0
The ADC Gain can be tuned by +/-10 % by tuning the voltage applied on GA by +/- 0.5V around $2*V_{CC3}/3$.

5.7. Offset Adjust (OA) function

This function allows to adjust ADC Offset so that it can always be tuned to mid-code 512.
The ADC Offset can be tuned by +/-40 LSB (+/- 20mV) by tuning the voltage applied on OA by +/- 0.5V around $2*V_{CC3}/3$.

5.8. Swing Adjust (SA) function

This function allows to reduce the nominal swing of the ADC in order to reduce power consumption in digital output buffers.

The nominal LVDS swing (250 to 450 mV) can be lowered (continuous tuning) to at least 100mV by reducing the voltage applied on SA by - 0.5V from middle value $2*V_{CC3}/3$ (When SA is set at $2*V_{CC3}/3$, the swing is a standard LVDS swing around 300 mV, when SA is set to $2*V_{CC3}/3 - 0.5V$, then swing is reduced to about 100 mV).

5.9. Decimation (DECN) function

The decimation function can be used for debug of the ADC at initial stages. This function indeed allows to reduce the ADC output rate by 8 (assuming a 1:1 DEMUX Ratio), thus allowing for a quick debug phase of the ADC at max speed rate and is compatible with industrial testing environment.

When active, this function makes the ADC output only 1 out of 8 data, thus resulting in a data rate which is 8 times slower than the clock rate. In addition, DEMUX Ratio can be chosen in order to divide the data rate by 16 (1:2 mode) or by 32 (1:4 mode).

Note: the ADC Decimation Test mode is different from the Test Mode function, which can be used to check the ADC outputs

DECN is active at low level.

To deactivate the decimation mode, connect DECN to a high level by connecting it to V_{CC3} or by leaving DECN pin floating.


5.10. Sampling Delay adjust (SDA) function

Sampling delay adjust (SDA pin) allows to fine tune the sampling ADC aperture delay TA around its nominal value. This functionality is enabled thanks to the SDAEN signal, which is active at low level (when tied to ground) and inactive at high level (10 K Ω to Ground, or tied to $V_{CC3} = 3.3V$, or left floating).

This feature is particularly interesting for interleaving ADCs to increase sampling rate.

The variation of the delay around its nominal value as a function of the SDA voltage is shown in the following graph (simulation result):

Figure 7 Typical tuning range is +/- 40 ps for applied control voltage varying between +/- 0.5V around $2 \cdot V_{CC3}/3$ on SDA pin.

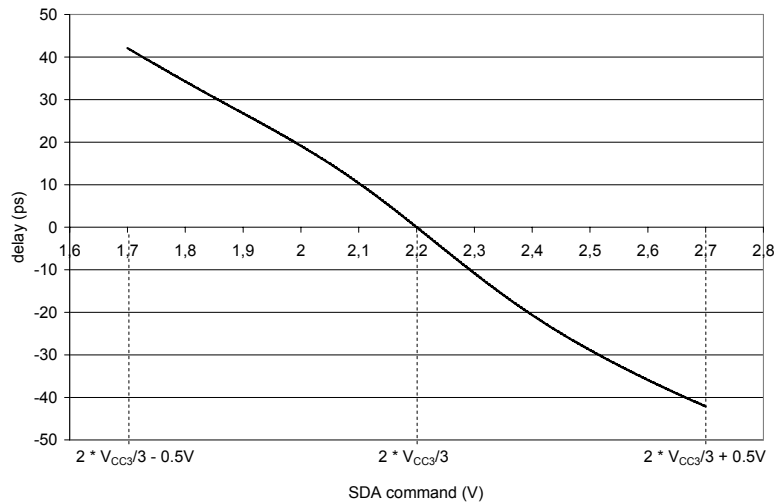

The variation of the delay in function of the temperature is negligible.

5.11. Temperature DIODE function

A diode for die junction temperature monitoring is available in this ADC. It is constituted by an ESD diode. Both Anode and cathode of the diode are accessible externally.

In order to monitor the die junction temperature of the ADC, a current of 1mA has to be applied on the DIODEA pin (anode of the diode). The voltage across the DIODEA pin and the DIODEC pin provides the junction temperature of the die thanks to the intrinsic diode characteristics provided in Figure 5.

It is recommended to use three protection diodes to avoid any damage due to over-voltages to the internal diode. The recommended implementation is provided in Figure 4.

Figure 8 Temperature DIODE implementation


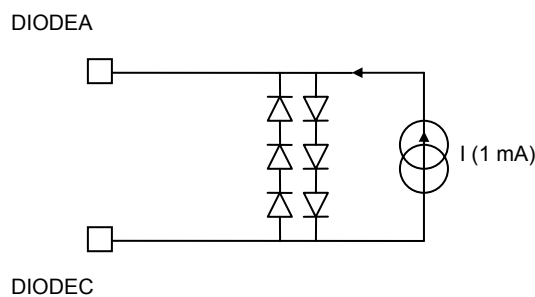



Figure 9 Temperature DIODE characteristics

Junction Temperature Versus Diode voltage for I=1mA

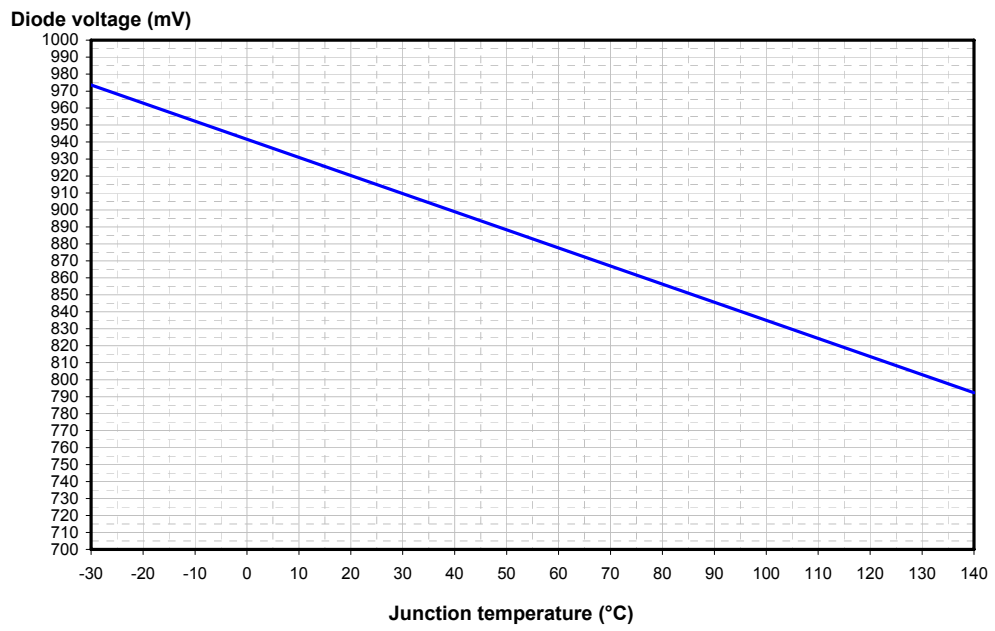




6 CHARACTERIZATION RESULTS


6.1. Input bandwidth @Fs=1.5GSps

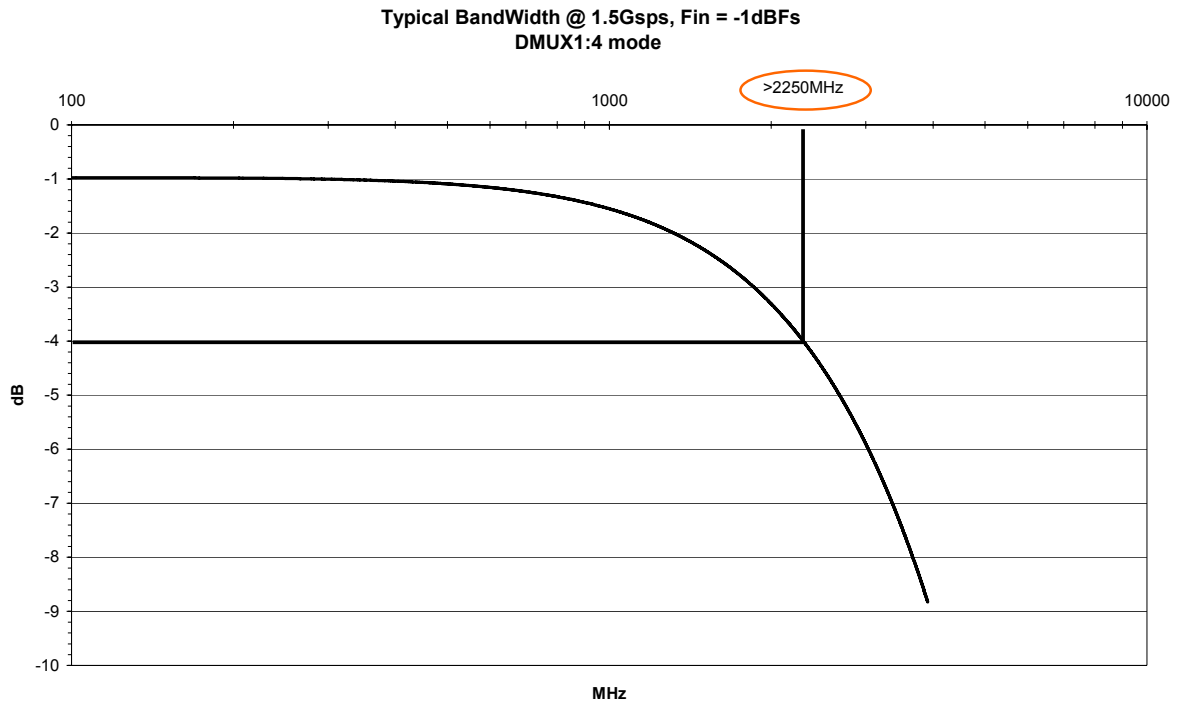


6.2. single tone FFT Computation versus Fin @ 1.5GSps

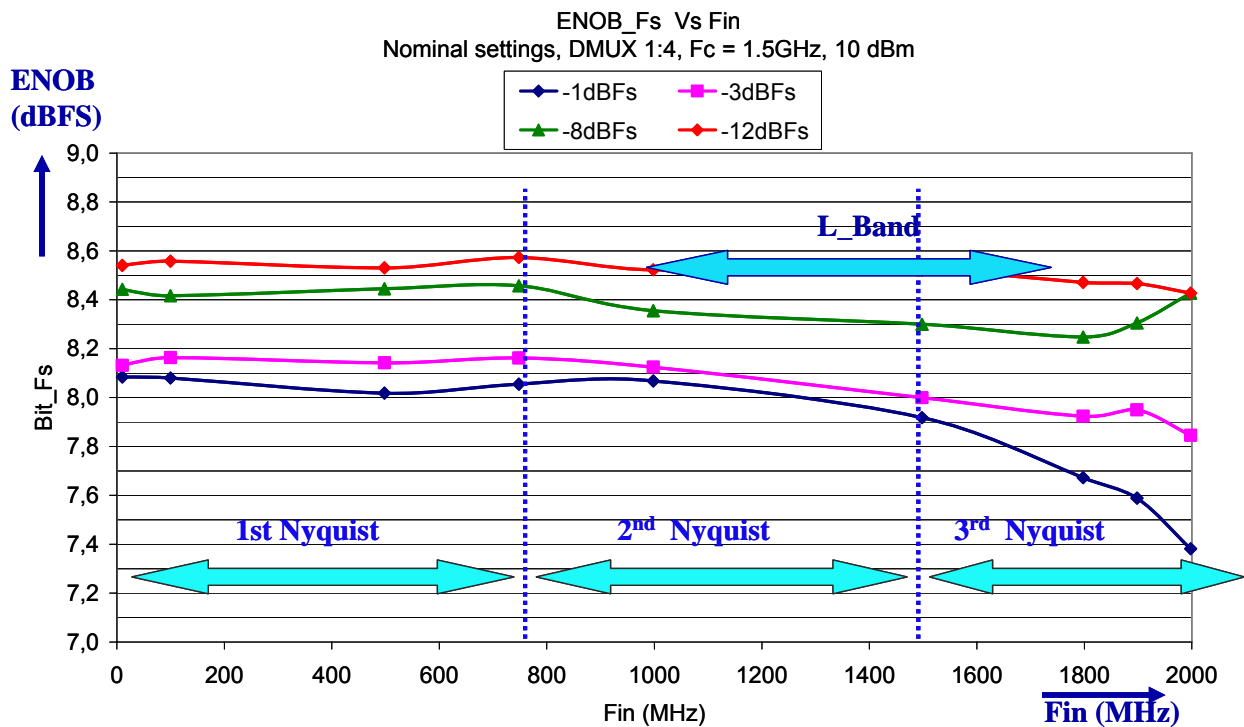


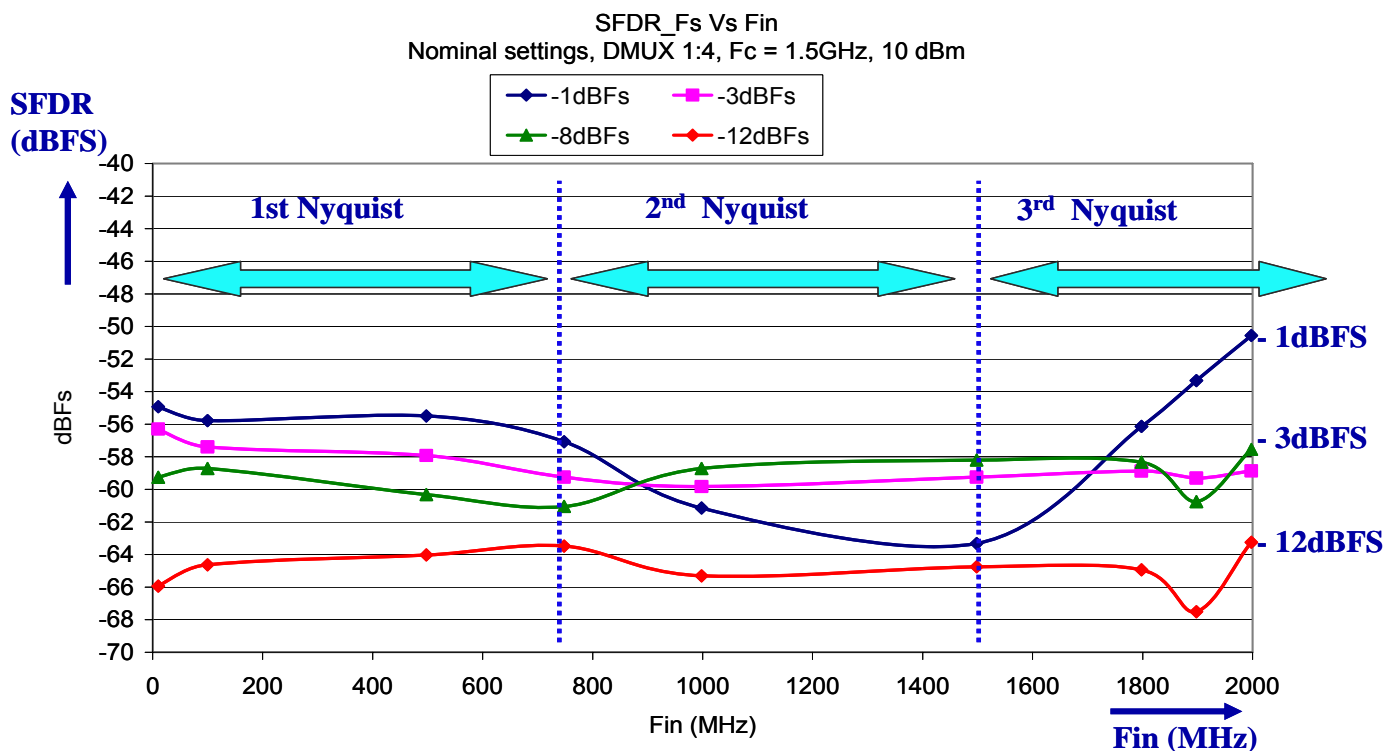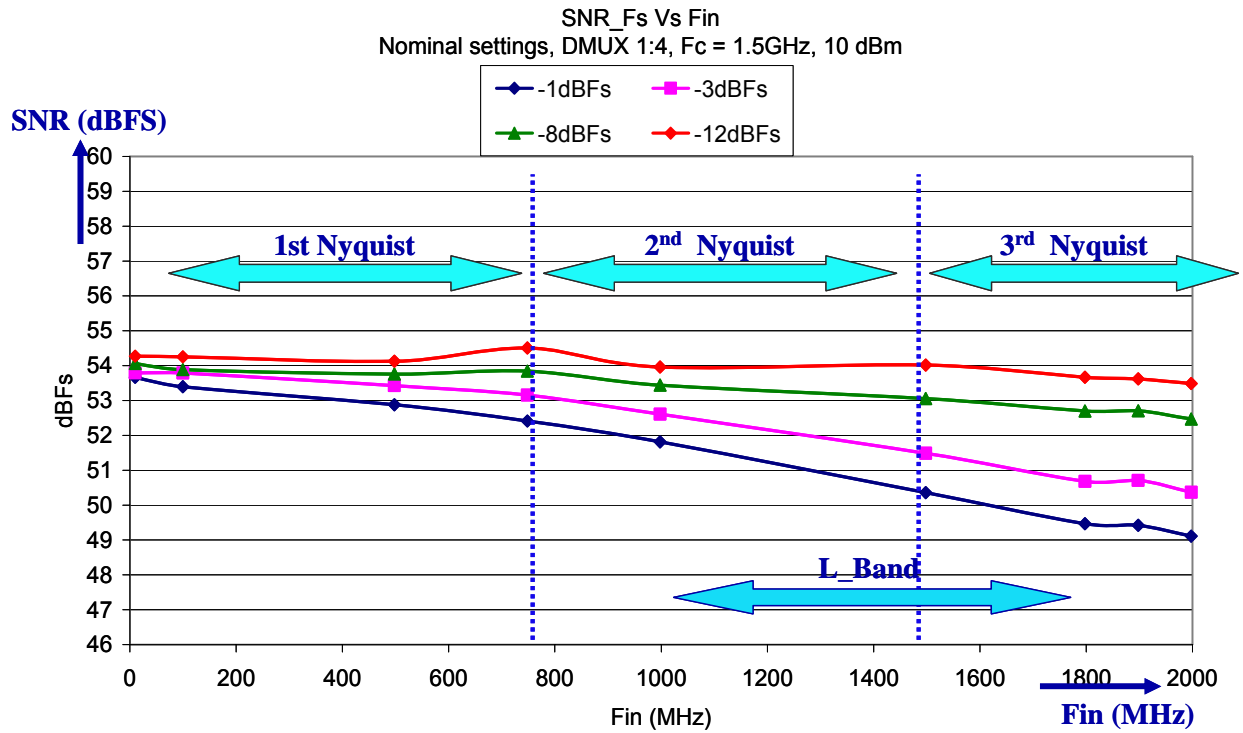

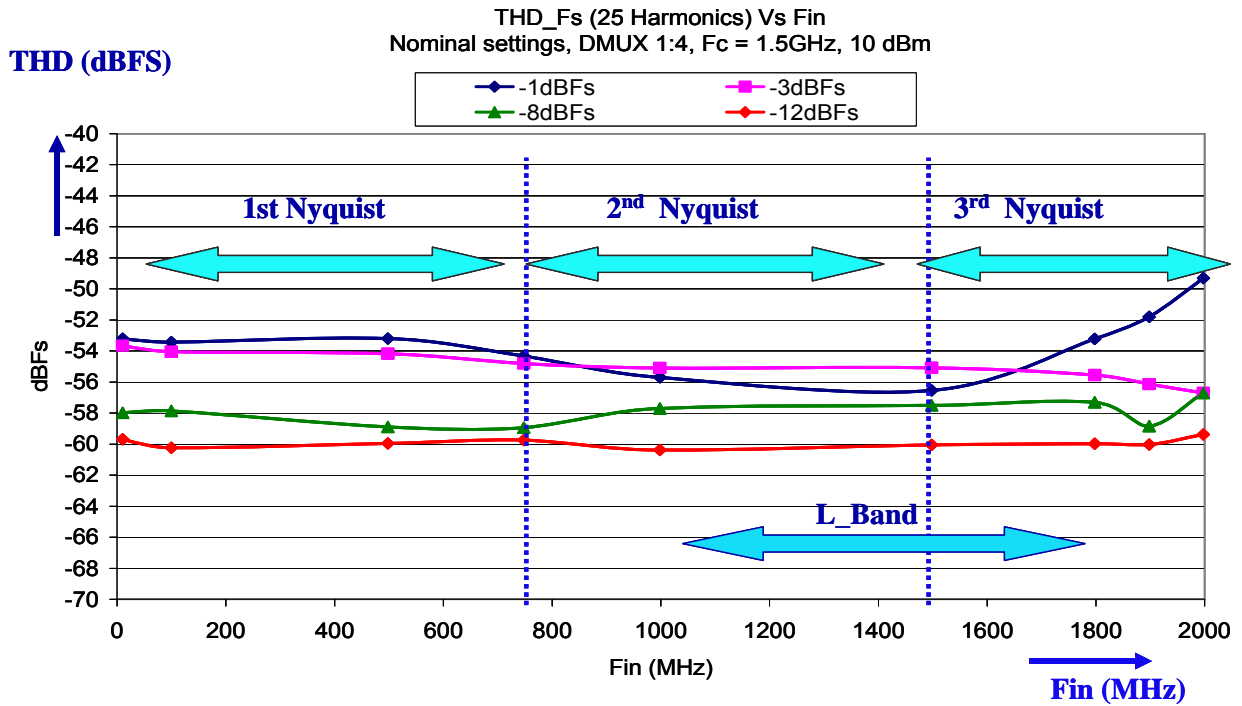



6.3. single tone FFT Computation versus Fs

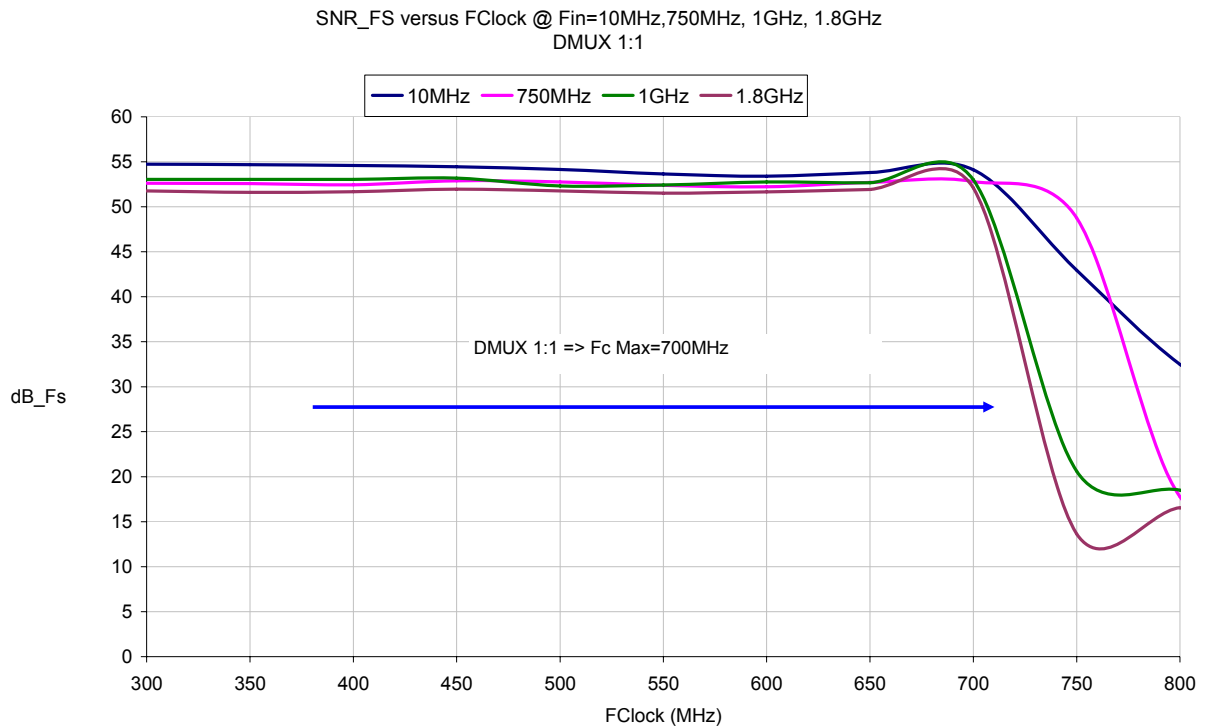

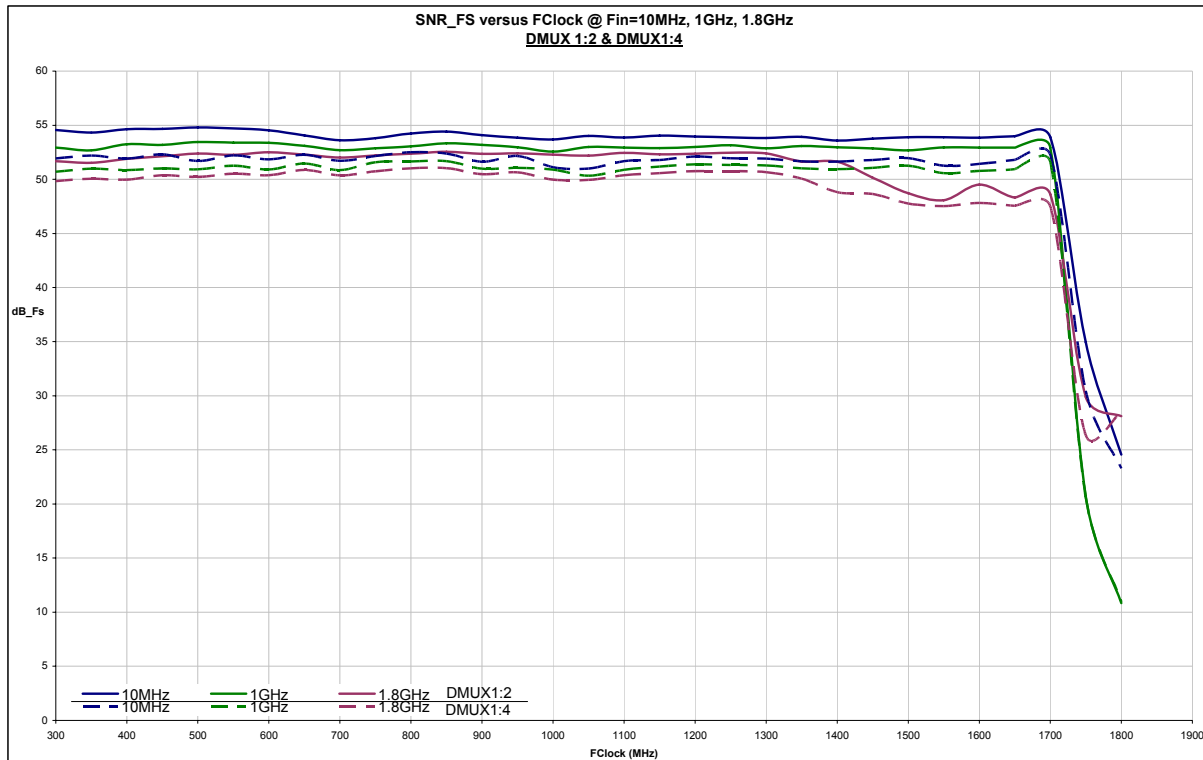

6.4. Broadband performances, noise power ratio

1.5GSps 1st Nyquist NPR at Optimum loading factor -13 dBFS (450 MHz Pattern, 5MHz Notch around 33MHz & 438MHz : NPR = 44 dB

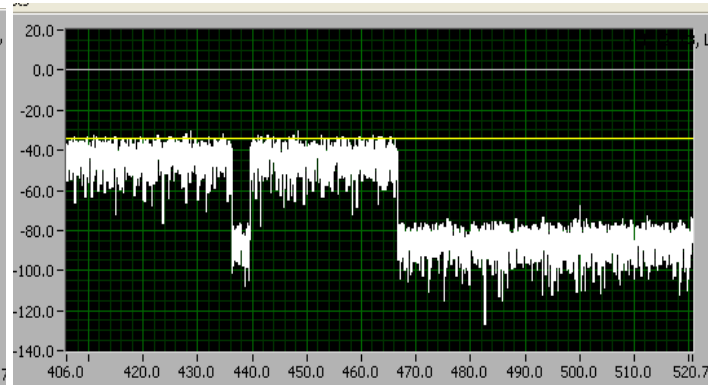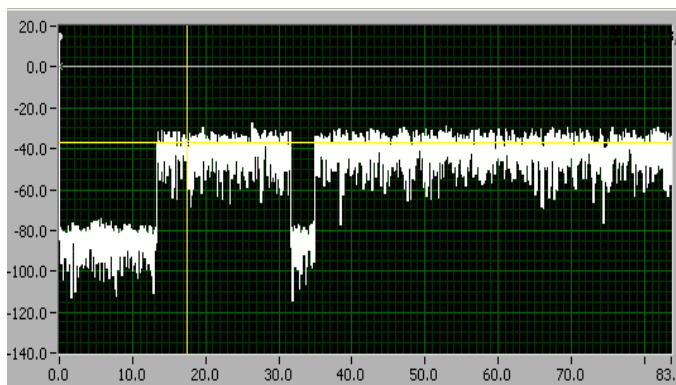


7 APPLICATION INFORMATION

7.1. Bypassing, decoupling and grounding

All power supplies have to be decoupled to ground as close as possible to the signal accesses to the board by 1 μF in parallel to 100 nF.

Figure 10 EV10AS180A Power supplies Decoupling and grounding Scheme

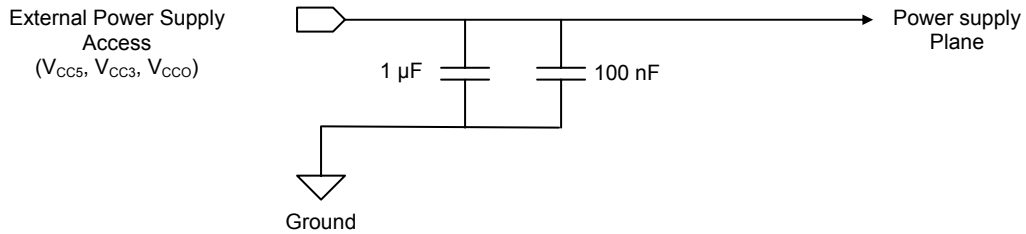


Each group of neighboring power supply pins attributed to the same value should be bypassed with at least one pair of 100 pF in parallel to 10 nF capacitors. These capacitors should be placed as close as possible to the power supply package pins.

The minimum required number of pairs of capacitors by power supply type is:

- 4 for V_{CC5}
- 4 for V_{CC3}
- 8 for V_{CC0}

Figure 11 EV10AS180A Power Supplies Bypassing Scheme

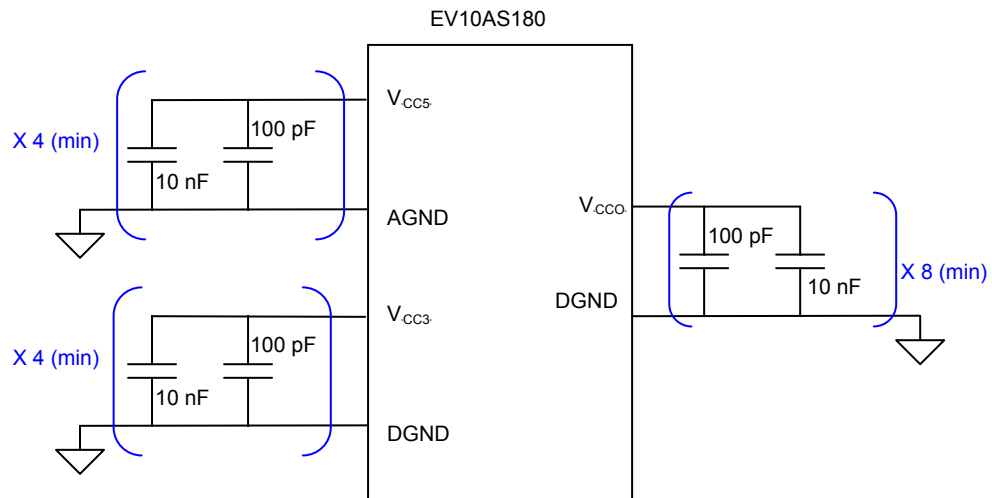

Each power supply has to be bypassed as close as possible to its source or access by 100 nF in parallel to 1 μF capacitors.


7.2. Analog Inputs (VIN/VINN)

The analog input should be used in differential mode. If a single-ended source is used, then a balun (transformer) should be implemented to convert the signal to a differential signal at the input of the ADC.

7.2.1. Differential analog input

The analog input should be AC coupled as described in [Figure 12](#).

Figure 12 Differential analog input implementation (AC coupled)

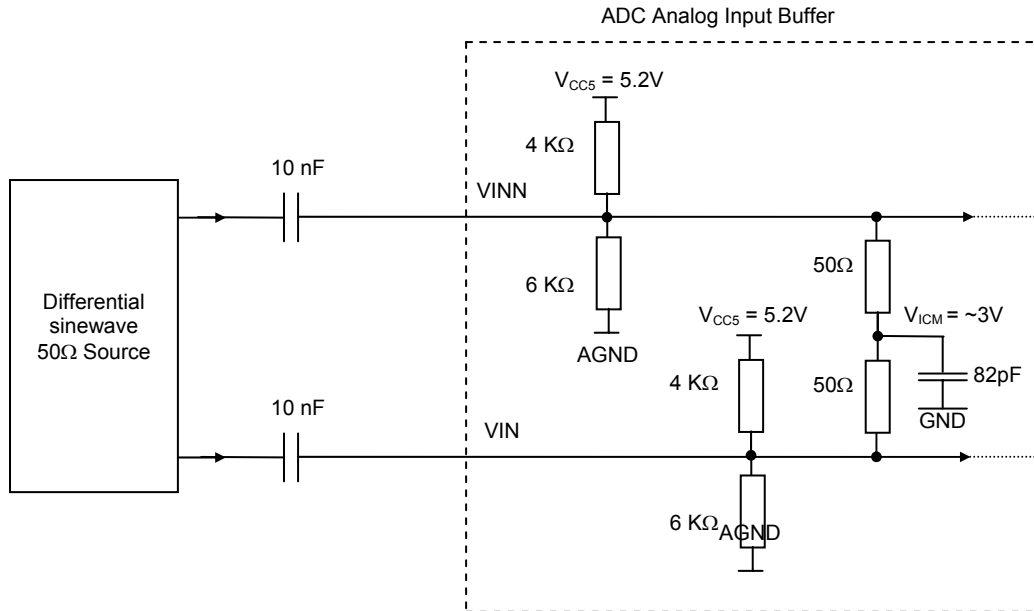


7.3. CLOCK INPUTS (CLK/CLKN)

Differential mode is the recommended input scheme. Single-ended clock input is not recommended due to performance limitations. If a single-ended source is used, then a balun (transformer) should be implemented to convert the signal to a differential signal at the input of the ADC.

Since the clock input common mode is 2.65V, we recommend to AC couple the input clock as described in [Figure 13](#).


Figure 13 Differential clock input implementation (AC coupled)

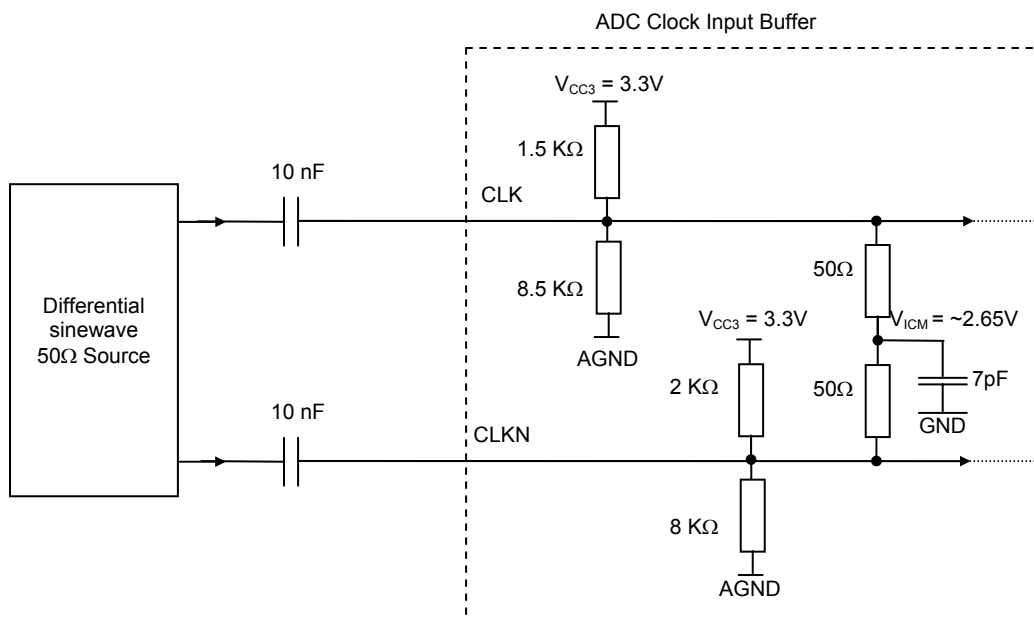

7.4. Digital Outputs

The digital outputs are LVDS compatible. They have to be 100Ω differentially terminated.

Figure 14 Differential digital outputs Terminations (100Ω LVDS)

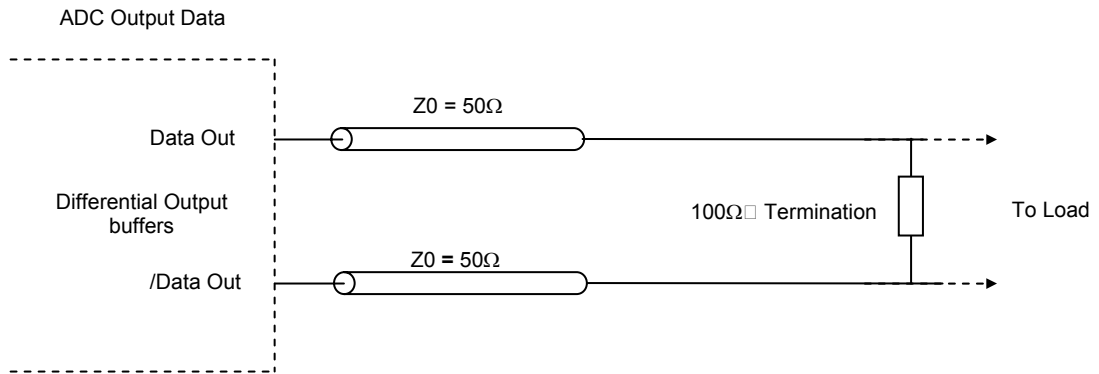

If the ADC is used in 1:1 or 1:2 DMUX modes, the unused ports can be left open (no external termination required).

8 THERMAL CHARACTERISTICS

Assumptions:

- Die thickness = 300 μ m
 - No convection
 - Pure conduction
 - No radiation
-
- Rth Junction -bottom of columns (NTK SCI – 0.89 mm diameter) = 9.68°C/W
 - Rthj-top of lid = 15°C/W
 - Rthj-board (JEDEC JESD51-8) = 13°C/W (board size = 39 x 39 mm, 1.6 mm thickness)

Assumptions:

- Convection according to JEDEC
 - Still air
 - Horizontal 2s2p board
-
- Rth-j-a (JEDEC) = 25.3°C/W (board size 114.3 x 76.2 mm, 1.6 mm thickness)


Assumptions:

- Convection according to JEDEC, except larger board dimensions and one additional copper plane
 - Still air
 - Horizontal 2s3p board
-
- Rth-j-a (JEDEC) = 18.9°C/W (board size 260 x 220 mm, 1.6 mm thickness)

9 PACKAGE DESCRIPTION

9.1. Top View

Figure 15 Ci-CGA255 Top view

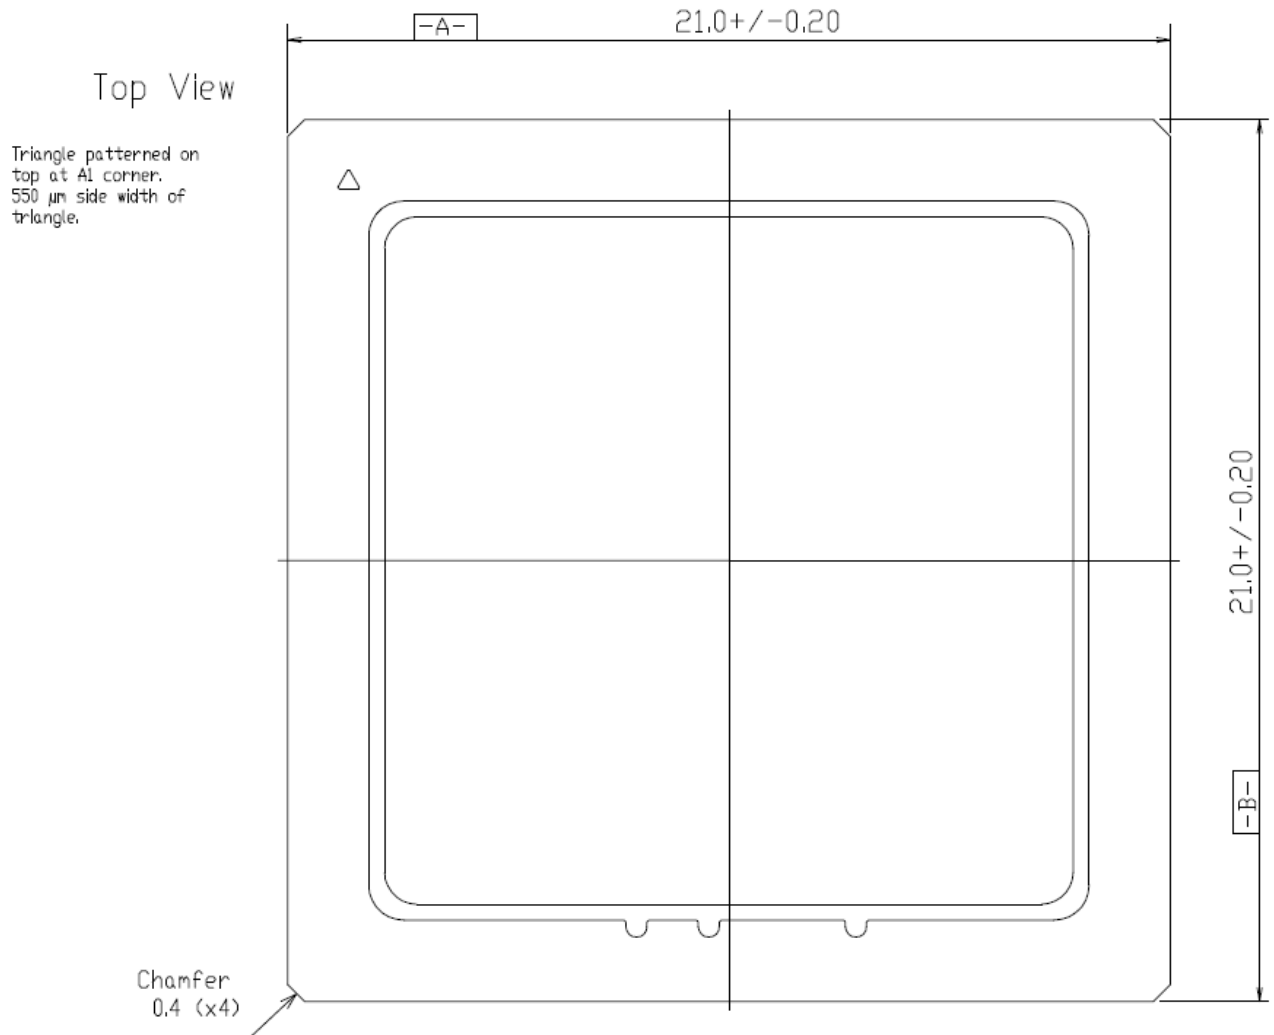


All units in mm

Sealing is connected to AGND

9.2. Bottom View


Figure 16 Ci-CGA255 Bottom view

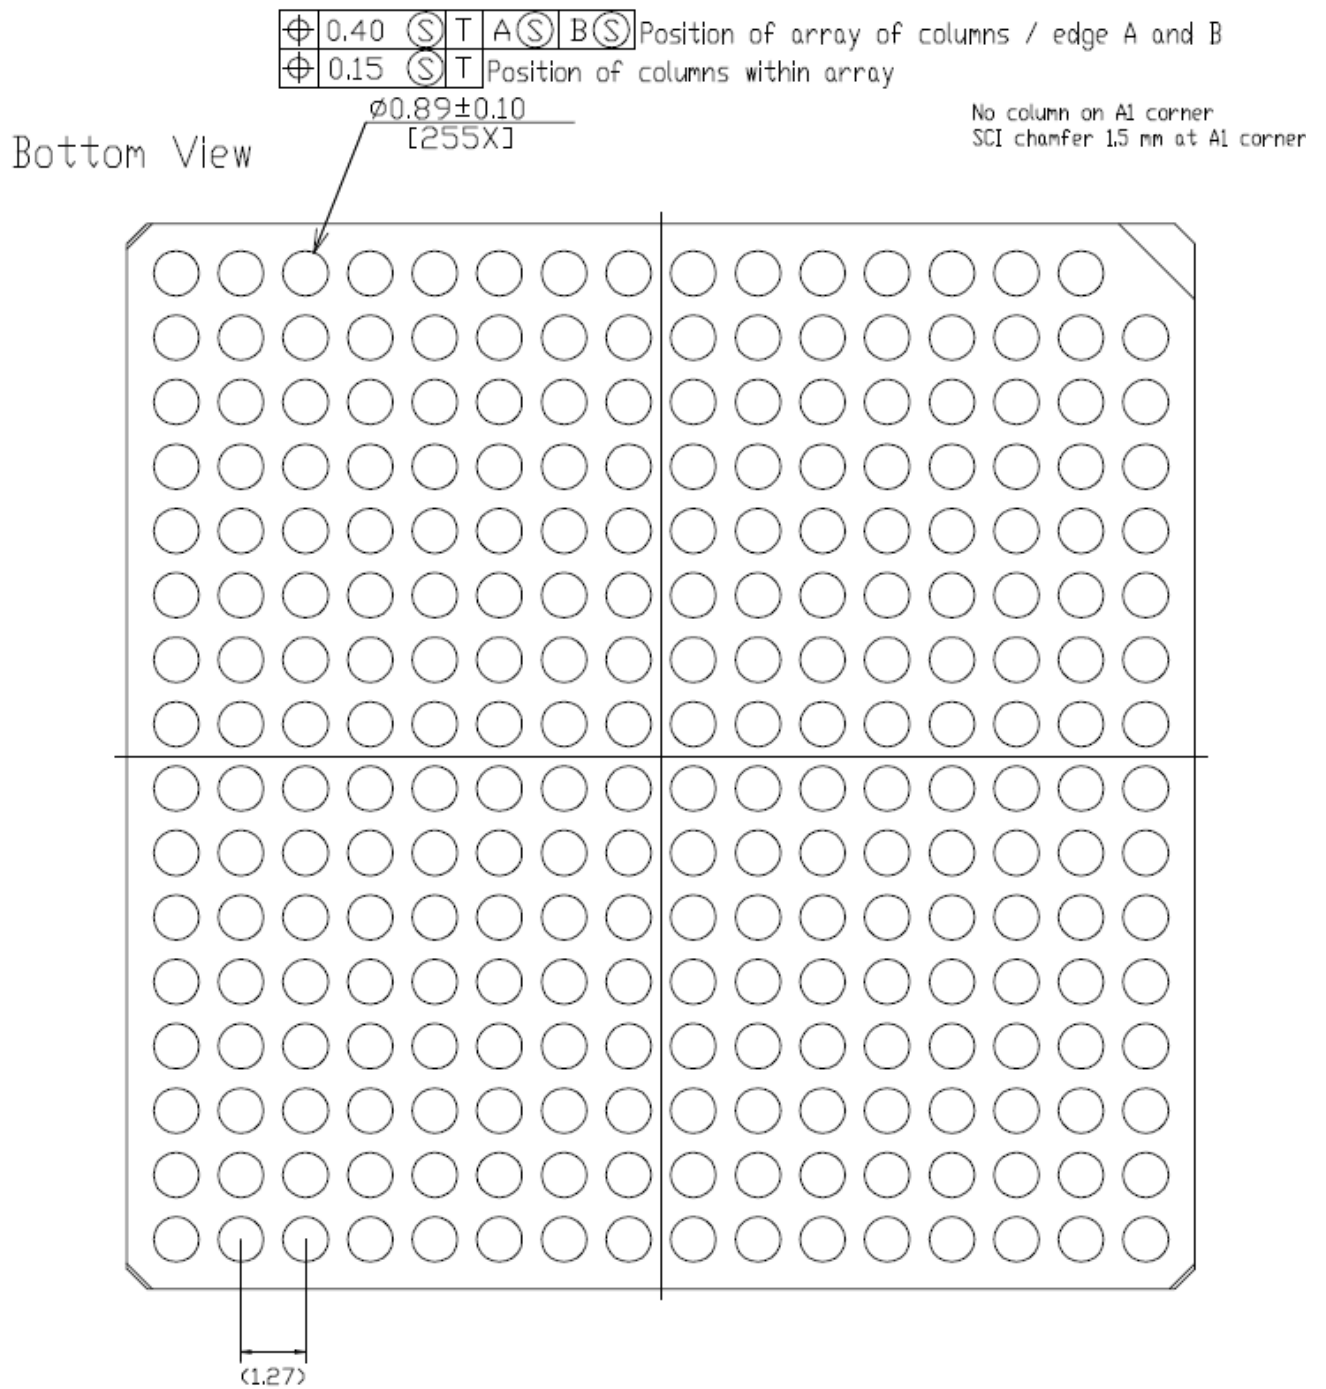

All units in mm

9.3. Side View

Figure 17 Ci-CGA255 Side view

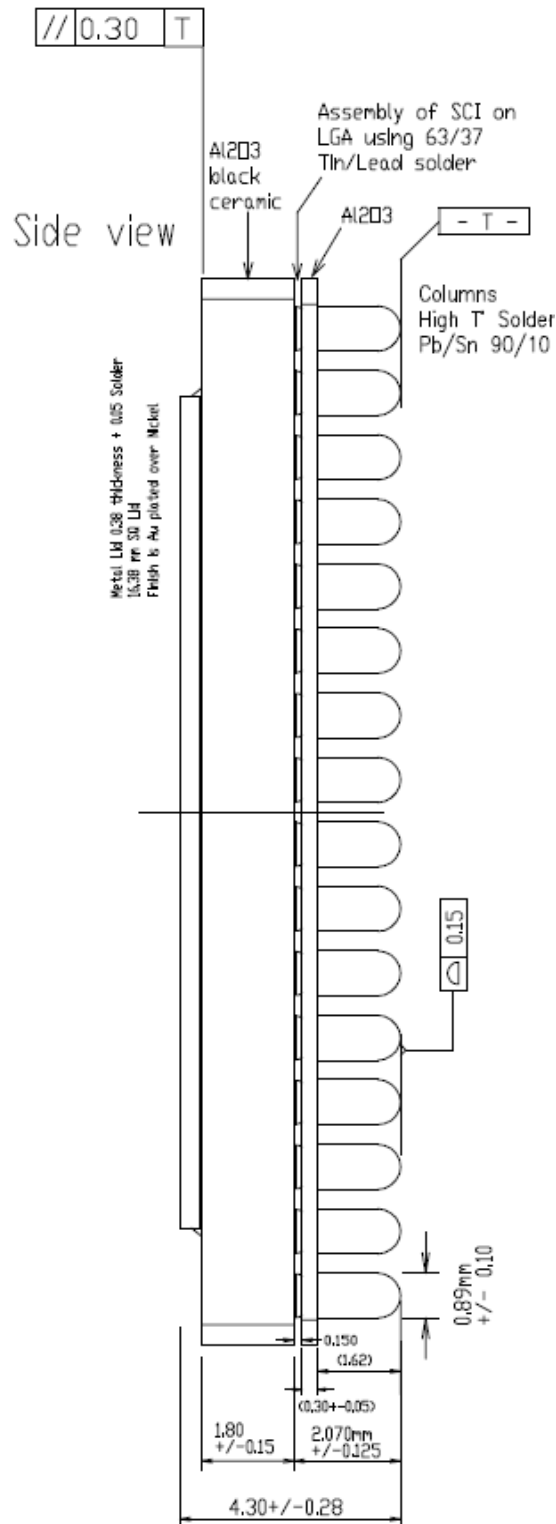

All units in mm

10 ORDERING INFORMATION

Table 14. Ordering information

Part Number	Package	Temperature Range	Screening Level	Comments
EVX10AS180AGS	CI-CGA255	Ambient	Prototype	silicon revision A
EV10AS180AMGSD/T	CI-CGA255	-55°C < Tc, Tj < 125°C	Military « M » Grade	silicon revision A
EV10AS180AMGS9NB1	CI-CGA255	-55°C < Tc, Tj < 125°C	Space Grade	silicon revision A
EV10AS180AGS-EB	CI-CGA255	Ambient	Prototype	Evaluation board

Table of contents

EV10AS180AGS	1
Low power L-Band 10-bit 1.5 GSps ADC.....	1
Datasheet - Preliminary.....	1
Main Features	1
Performances.....	1
Main Applications.....	1
1 GENERAL DESCRIPTION	2
2 CIRCUIT ELECTRICAL CHARACTERISTICS.....	4
2.1. Absolute Maximum Ratings.....	4
2.2. Recommended Conditions Of Use.....	4
2.3. Electrical Characteristics	5
2.4. Converter Characteristics.....	6
2.5. Dynamic Performance.....	6
2.6. Sensitivity to radiations.....	9
2.7. Timing Characteristics and Switching Performances	10
2.8. Timing Diagrams	12
2.9. Explanation of Test Levels	15
2.10. Coding.....	15
3 DEFINITION OF TERM.....	16
4 PIN DESCRIPTION.....	18
5 FUNCTIONAL DESCRIPTION	28
5.1. Control signal settings	28
5.2. DEMUX Ratio Select (RS0, RS1) function	29
5.3. Test Mode (TM0, TM1) function	30
5.4. External Reset (RSTN).....	30
5.5. Power Up Reset	31
5.6. Gain Adjust (GA) function.....	31
5.7. Offset Adjust (OA) function.....	31
5.8. Swing Adjust (SA) function.....	31
5.9. Decimation (DECN) function	31
5.10. Sampling Delay adjust (SDA) function	31
5.11. Temperature DIODE function.....	32
6 CHARACTERIZATION RESULTS	34
6.1. Input bandwidth @Fs=1.5GSps	34
6.2. single tone FFT Computation versus Fin @ 1.5GSps.....	34
6.3. single tone FFT Computation versus Fs	36
6.4. Broadband performances, noise power ratio	37
7 APPLICATION INFORMATION.....	38
7.1. Bypassing, decoupling and grounding	38
7.2. Analog Inputs (VIN/VINN).....	39
7.3. CLOCK INPUTS (CLK/CLKN).....	39
7.4. Digital Outputs	40
7.5. Board layout recommendations.....	Erreur ! Signet non défini.
8 Thermal characteristics	41
9 PACKAGE DESCRIPTION.....	42
9.1. Top View.....	42
9.2. Bottom View	43
9.3. Side View.....	44
9.4. Cross Section	45
10 Ordering Information	46



How to reach us

Home page: www.e2v.com

Sales Office:

Northern Europe

e2v ltd

106 Waterhouse Lane
Chelmsford Essex CM1 2QU
England
Tel: +44 (0)1245 493493
Fax: +44 (0)1245 492492
E-Mail: enquiries@e2v.com

Americas

e2v inc.

4 Westchester Plaza
Elmsford
NY 10523-1482
USA
Tel: +1 (914) 592 6050
Fax: +1 (914) 592-5148
E-Mail: enquiries-na@e2v.com

Southern Europe e2v sas

16 Burospace
F-91572 Bièvres
Cedex
France
Tel: +33 (0) 1 60 19 55 00
Fax: +33 (0) 1 60 19 55 29
E-Mail: enquiries-fr@e2v.com

Asia

Pacific

e2v ltd
11/F.,
Onfem Tower,
29 Wyndham
Street, Central, Hong
Kong
Tel: +852 3679 364 8/9
Fax: +852 3583 1084
E-Mail: enquiries-ap@e2v.com

Germany and Austria e2v gmbh

Industriestraße 29
82194 Gröbenzell
Germany
Tel: +49 (0) 842 410 570
Fax: +49 (0) 842 284 547
E-Mail: enquiries-de@e2v.com

Product Contact:

e2v
Avenue de Rochepleine
BP 123 - 38521 Saint-Egrève Cedex
France
Tel: +33 (0)4 76 58 30 00
Hotline:
E-Mail : hotline-bdc@e2v.com

Whilst e2v has taken care to ensure the accuracy of the information contained herein it accepts no responsibility for the consequences of any use thereof and also reserves the right to change the specification of goods without notice. e2v accepts no liability beyond that set out in its standard conditions of sale in respect of infringement of third party patents arising from the use of tubes or other devices in accordance with information contained herein.